



DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis


Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Weight Distribution

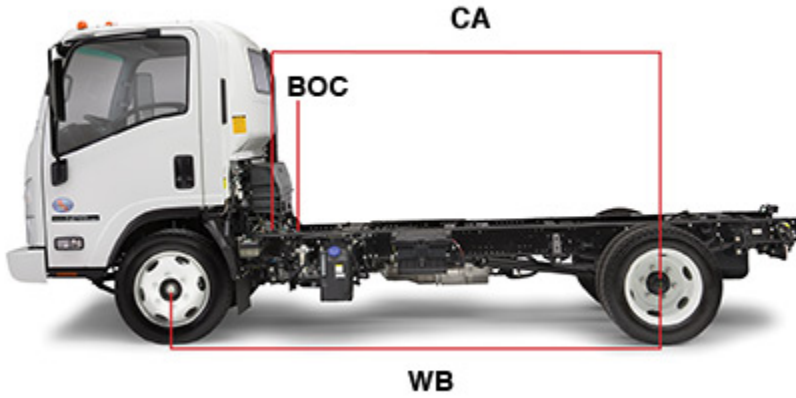

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	109 inches
Cab-to-Axle (CA)	86.5 inches
Body Length	
Body Weight	
Back of Cab (BOC)	7.7 inches

**** You must fill in body length and weight to enable body and payload weight calculations.**

Front Wt.	4,327.00 lbs.	68%
Rear Wt.	2,012.00 lbs.	32%
GVWR	14,500.00 lbs.	
GVW	6,339.00 lbs.	
Remaining Payload Weight	8,161.00 lbs.	

Weight (lbs.)	Front	Rear	Total
Chassis	3,977.00	2,012.00	5,989.00
Chassis Equipment	0.00	0.00	0.00
Subtotal	3,977.00	2,012.00	5,989.00
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	4,327.00	2,012.00	6,339.00
GAWR/GVWR	5,360.00	9,880.00	14,500.00
GCWR			20,500.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning		0.00 lbs.	0.00 lbs.	0.00 lbs.
141	30 Gallon Stainless Steel In-Rail Fuel Tank		0.00 lbs.	0.00 lbs.	0.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Selected Model and Options

Code	Description	Weight	MSRP
Model			
3F1	NPR-HD Cab Chassis 109"WB, 86.5"CA		\$63,024.00
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning		\$0.00
Tires			
I5H	LRR (low rolling resistance)	0.0 lbs.	Inc.
Engine			
I1B	4HK1-TC, diesel engine 317 CID (5.19L), 215 HP at 2550 RPM: 452 ft.-lb. gross torque at 1850 RPM. 4 cylinder, 16 valve, four cycle, overhead cam, turbocharged, inter-cooled, water cooled EGR valve, direct injection, electronically controlled common rail fuel system, engine cruise control function. Oil level check switch and light. Engine Warning system with audible warning for low oil pressure, high coolant temperature, and low coolant level.	0.0 lbs.	Inc.
Transmission			
I1W	Aisin A465id 6-speed automatic transmission, Ratios: 3.742, 2.003, 1.343,	0.0 lbs.	Inc.
Wheelbase			
IA8	109 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in3 RBM 316,800 lb./ft./in. per rail. 86.5"CA	0.0 lbs.	Inc.
Air Cleaner			
KNX	Dry Paper single element. (Donaldson brand) Air cleaner canister standard with air restriction indicator in the driver's Multi-Information Display (MID).	0.0 lbs.	Inc.
Alternator			
I2C	140 AMP. with integral regulator.	0.0 lbs.	Inc.
Battery			
IX1	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts	0.0 lbs.	Inc.
Exhaust			
IX7	Single horizontal with DPF/SCR exhaust system	0.0 lbs.	Inc.
Front Axle			
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs.	Inc.
Front Suspension			
ID4	6,830 lb. capacity. Semi-elliptical tapered leaf springs. Includes shock absorbers and stabilizer bar.	0.0 lbs.	Inc.
Front Wheels			
RBY	16" X 6", 6-hole disc, painted white.	0.0 lbs.	Inc.
Front Tires			
I53I69	215/85R16E (10 ply) tubeless Radial, all season tread.	0.0 lbs.	Inc.
Rear Suspension			
I27	9,880 lbs. capacity. Semi-elliptical main and auxiliary	0.0 lbs.	Inc.

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Selected Model and Options

Code	Description	Weight	MSRP
Rear Axle			
	multi-leaf springs. Includes shock absorbers		
I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.	Inc.
Ratio			
005	4.56:1	0.0 lbs.	Inc.
Rear Wheels			
RBZ	16" X 6", 6-hole disc, painted white.	0.0 lbs.	Inc.
Rear Tires			
I53134	215/85R16E (10 ply) tubeless Radial, all season tread.	0.0 lbs.	Inc.
Fuel Tank			
I4I	30 Gallon Stainless Steel In-Rail Fuel Tank	0.0 lbs.	Inc.
Seat			
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.	Inc.
Brakes			
K40	Butterfly valve type exhaust brake	0.0 lbs.	Inc.
IE1	Vacuum + Power Assist; hydraulic 4-wheel disc brakes with 4-channel ABS. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard.	0.0 lbs.	Inc.
Air Conditioning			
C60	Air conditioner	0.0 lbs.	Inc.
Power Windows & Door Locks			
IL0	Yes	0.0 lbs.	Inc.
Floor Mats			
IQ6	Standard Floor Mats	0.0 lbs.	Inc.
Model Option			
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning	0.0 lbs.	Inc.
Assistance System			
I5I	Electronic Vehicle Stability Control (EVSC) include ASR (Anti-Slip Regulation)	0.0 lbs.	Inc.
Accessories			
IX2	Rear body dome lamp switch	0.1 lbs.	Inc.
8RP	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO	0.0 lbs.	Inc.
Totals			
	Base Price		\$63,024.00
	Destination Charge		\$1,825.00
	Material & Transportation Surcharge		\$675.00
	DEF Fill Charge		\$10.00
	Total Options Price		\$
	Tire Weight Tax		\$0.00
	Total		\$65,534.00

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Standard Equipment Summary

Code	Description
Tires	
I5H	LRR (low rolling resistance)
Engine	
I1B	4HK1-TC, diesel engine 317 CID (5.19L), 215 HP at 2550 RPM: 452 ft.-lb. gross torque at 1850 RPM. 4 cylinder, 16 valve, four cycle, overhead cam, turbocharged, inter-cooled, water cooled EGR valve, direct injection, electronically controlled common rail fuel system, engine cruise control function. Oil level check switch and light. Engine Warning system with audible warning for low oil pressure, high coolant temperature, and low coolant level.
Transmission	
I1W	Aisin A465id 6-speed automatic transmission, Ratios: 3.742, 2.003, 1.343,
Wheelbase	
IA8	109 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in ³ RBM 316,800 lb./ft./in. per rail. 86.5"CA
Air Cleaner	
KNX	Dry Paper single element. (Donaldson brand) Air cleaner canister standard with air restriction indicator in the driver's Multi-Information Display (MID).
Alternator	
I2C	140 AMP. with integral regulator.
Battery	
IX1	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts
Exhaust	
IX7	Single horizontal with DPF/SCR exhaust system
Front Axle	
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
Front Suspension	
ID4	6,830 lb. capacity. Semi-elliptical tapered leaf springs. Includes shock absorbers and stabilizer bar.
Front Wheels	
RBV	16" X 6", 6-hole disc, painted white.
Front Tires	
I53I69	215/85R16E (10 ply) tubeless Radial, all season tread.
Rear Suspension	
I27	9,880 lbs. capacity. Semi-elliptical main and auxiliary multi-leaf springs. Includes shock absorbers
Rear Axle	
I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.
Ratio	
005	4.56:1
Rear Wheels	
RBZ	16" X 6", 6-hole disc, painted white.
Rear Tires	
I53I34	215/85R16E (10 ply) tubeless Radial, all season tread.
Fuel Tank	
I4I	30 Gallon Stainless Steel In-Rail Fuel Tank
Seat	
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.
Brakes	
K40	Butterfly valve type exhaust brake
IE1	Vacuum + Power Assist; hydraulic 4-wheel disc brakes with 4-channel ABS. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard.

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Standard Equipment Summary

Code	Description
Air Conditioning	
C60	Air conditioner
Power Windows & Door Locks	
IL0	Yes
Floor Mats	
IQ6	Standard Floor Mats
Model Option	
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning
Assistance System	
I5I	Electronic Vehicle Stability Control (EVSC) include ASR (Anti-Slip Regulation)
Accessories	
IX2	Rear body dome lamp switch
8RP	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Optional Equipment

Options			
Code	Description		MSRP
IF6	Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab		\$88.00
IY4	Delete radio		(\$136.00)
IS0	Heated Mirrors		\$180.00
IU2	Mirror Bracket for 102" wide body		\$156.00
UZF	Back up alarm		\$112.00
I4H	CAN interface converter		\$332.00
IH2	Engine emergency shutdown system HWT, LWL, LOP		\$100.00
IY9	Engine idle shutdown (timer set at 3 minutes for engine shutdown)		\$100.00
I9A	Engine idle shutdown (timer set at 5 minutes for engine shutdown)		\$100.00
IL9	PTO enable switch and engine idle up switch recommended for PTO and idle applications only		\$48.00
I4K	Keyless entry system including two keypads as standard		\$316.00
I6K	Lockable DEF fill cap		\$80.00
I1L	Speed limited to 58 MPH		\$100.00
I2L	Speed limited to 65 MPH		\$100.00
I4L	Speed limited to 70 MPH		\$100.00
I3L	Speed limited to 68 MPH		\$100.00
I5L	Locking DEF cap (all keyed alike on multiple chassis ordered together)		\$80.00
I7L	High visibility seat belt (driver seat only)		\$92.00
I8L	High visibility seat belt (driver and RH passenger seat)		\$184.00
WAG	60 months / 200,000 Miles PLUS		\$1,667.00
I1V	Audio System with 7" diagonal color touch screen		\$1,320.00
I2V	Audio System with 7" diagonal color touch-screen with backup camera (camera shipped loose)		\$1,520.00
I0W	Heated dual remote control mirrors (17" head)		\$800.00
I5W	Engine oil pan heater with receptacle (125V 300W)		\$288.00
I4V	Forward collision and lane departure warning (Mobileye)		\$1,260.00
I3Z	Spare keys (2 additional, 4 keys in total)		\$40.00
I4Z	Front panel film		\$224.00
I6B	AGM batteries (825 CCA x 2)		\$440.00
I8T	Chrome Grille		\$228.00
I2M	Delete cruise control switch		\$20.00
I6L	LED lighting package		\$440.00
I72	Block heater with receptacle		\$208.00
I79	Block heater and oil pan heater with receptacle		\$316.00
IF4	Air Deflector roof mounted (not available in Crew Cab)		\$1,200.00
IV8	Seat Covers standard cab		\$380.00
I0A	Cross rail horizontal DPF/SCR with vertical exhaust		\$5,700.00

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Optional Equipment

Options			
	Code	Description	MSRP
		(Available only with in rail fuel tank and single cab)	
	I1M	Seat covers standard cab with suspension seat	\$400.00
	I6T	Suspension driver's seat	\$900.00
	KD1	Knapheide Dump Body, Inside Dimensions 11.25' x 86.9" x 12" (sides)	\$17,940.00
	KL3	Knapheide Landscape Dump Body, 11' x 94.4" x 40" (sides)	\$23,580.00
	I0Y	Window Shade Tarp Kit	\$1,824.00
	I1Y	2x6 Polyboard Side Board Extensions	\$320.00
	I4X	Landscaper Tarp	\$1,928.00

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



DELAND ISUZU TRUCK

Douglas Nosbisch, Jr | 386-734-8740 | doug@delandtruckcenter.com

2024 Base FSA chassis (2024 NPR-HD Cab Chassis, 3F1 109"WB, 86.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Warranty

Warranty Limitations: Time or Mileage, Whichever Comes First

<i>New Truck Warranty</i>	<i>Time in Years</i>	<i>Vehicle Miles</i>
<i>Basic</i>	3	<i>Unlimited</i>
<i>Engine</i>	3	<i>Unlimited</i>
<ul style="list-style-type: none"> <i>Transmission</i> <i>Drive Axle</i> <i>Driveshaft</i> <i>Front Axle I Beam</i> <i>Crossmembers</i> <i>Flywheel Housing</i> <i>Clutch Housing</i> 	3	<i>Unlimited</i>
<i>Frame Rails</i>	3 5*	<i>Unlimited</i> <i>Unlimited*</i>
<i>Corrosion (Rust Through)</i>	4	<i>Unlimited</i>
<i>Roadside Assistance</i>	3 5†	<i>Unlimited</i> 100,000†
<i>Emission Warranty</i>	<i>Time in Years</i>	<i>Vehicle Miles</i>
<i>Emission Control System</i>	5	110,000
<i>Emission Performance</i>	5	50,000
<i>GHG Emission</i>	5	50,000
<i>Tires</i>	2	24,000

After 3 years labor and parts coverage is 50% for up to 5 years.

†Tows related to emissions issues may be covered for up to 5 years or 110,000 miles (whichever comes first).

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. Please see your authorized Isuzu dealer for warranty details.

Current report content is based on data as of 2023-06-25 14:02:55. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.