# 3\engprojects\Alachua County - Cuscowilla Fire Station\Plans\Current DWG\C23052J1.dwg, C100 - COVER, 4/25/2024 3:43:26 PN


# ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL DEVELOPMENT PLAN

ALACHUA COUNTY, FLORIDA

	DEVELOPMENT INFORMATION						
1.	NAME OF PROJECT:	ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL DEVELOPMENT PLAN					
2.	PROJECT DESCRIPTION	THE PROPOSED DEVELOPMENT CONSISTS OF THE CONSTRUCTION OF AN APPARATUS BUILDING (PHASE 1/INITIAL PHASE 1,920 SF) WITH ASSOCIATED PARKING, UTILITY & STORMWATER IMPROVEMENTS.					
3.	PROJECT ADDRESS:	12264 S US HWY 441 ALACHUA COUNTY, FL 32667					
4.	TAX PARCEL NUMBER:	16392-000-000					
5.	SECTION/TOWNSHIP/RANGE:	SECTION 08, TOWNSHIP 11 SOUTH, RANGE 20 EAST					
6.	ZONING:	AGRICULTURE					
7.	FUTURE LAND USE DESIGNATION:	RURAL/AGRICULTURE					
8.	TOTAL SITE AREA:	5.0 ACRES (+/-)					
9.	THE OFFICE/FIRE CREW HOUSING STRUCTURE SHALL BE PROTECTED BY AN APPROVED SUPERVISED AUTOMATIC SPRINKLER SYSTEM. NFPA 13.3.23						

	CONTACT INFORMATION						
1.	PROPERTY OWNERS:	ALACHUA COUNTY 915 SE 5TH STREET. GAINESVILLE, FL 32601 (352) 374-5289 CONTACT: DANIEL WHITCRAFT					
2.	ENGINEER:	eda consultants inc. 720 S.W. 2nd AVE. SOUTH TOWER, SUITE 300 GAINESVILLE, FL 32601 (352) 373—3541 CONTACT: SERGIO REYES, P.E.					
3.	PLANNER:	eda consultants inc. 720 S.W. 2nd AVE. SOUTH TOWER, SUITE 300 GAINESVILLE, FL 32601 (352) 373–3541 CONTACT: CLAY SWEGER, AICP, LEED AP					
4.	SURVEYOR:	eda consultants inc. 720 S.W. 2nd AVE. SOUTH TOWER, SUITE 300 GAINESVILLE, FL 32601 (352) 373—3541 CONTACT: BOB GRAVER, PSM					

DEVELOPMENT DATA							
DESCRIPTION	CRITERIA	REQUIRED	PROVIDED				
BUFFER & SCREENING	1. NORTH: SUP 2. WEST: SUP 3. EAST: SUP 4. SOUTH: SUP	1. NORTH: NONE REQUIRED 2. WEST: NOT REQUIRED 3. EAST: 30' BUFFER W/EXISTING VEGETATION TO REMAIN 4. SOUTH: 40' HIGH DENSITY BUFFER	1. NORTH: NONE PROPOSED  2. WEST: NON PROPOSED  3. EAST: 30' BUFFER W/EXISTING VEGETATION TO REMAIN  4. SOUTH: 40' HIGH DENSITY BUFFER (WITH EXISTING VEGETATION TO REMAIN)				
VEHICULAR PARKING	TABLE 407.14.1	1 SPACE PER PERSON ON DUTY ON LARGEST SHIFT (3)	5 SPACES				
MOTORCYCLE PARKING	407.14	NOT REQUIRED IF UNDER 40 SPACES	0 SPACES				
BICYCLE PARKING	407.15	1 PERSON 10 SPACES	2 SPACES 1 U-RACK				
HANDICAP PARKING	407.19 (d)	1 PERSON 25 SPACES	1 H.C. SPACE				

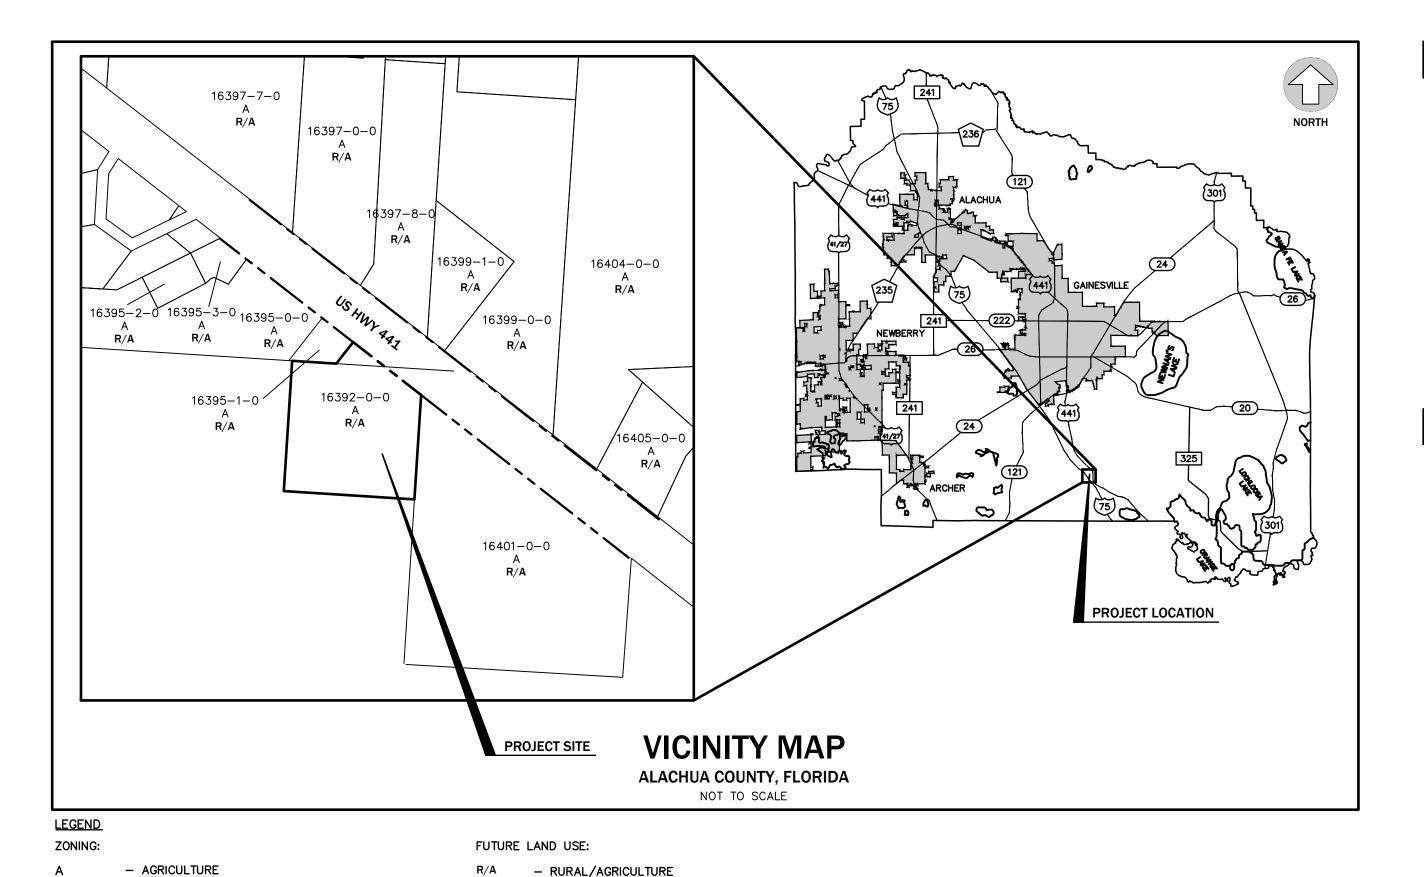

**UTILITIES TO BE PROVIDED AND PROVIDER** 

POTABLE WATER: | PRIVATE WATER WELL

DUKE ENERGY

PRIVATE SEPTIC TANK

ITE LAND USE: 575 FIRE AND RESCUE STATION								
PROPOSED: APPARATUS BUILDING AND EXISTING BUILDING TO REMAIN								
	TRIP DIS	TRBUTION	PROJECTED TRIPS					
PERIOD	RATE	PER UNIT	TRIPS	ENTER	EXIT	IN	OUT	
PM 0.48 3.37 1.62 29% 71% 0.47 1.15								

CONDITIONS OF APPROVAL
I. GOPHER TORTOISES (GT) HAVE BEEN DOCUMENTED WITHIN THE PROJECT SITE. NO CLEARING OR CONSTRUCTION ACTIVITIES CAN COMMENCE UNTIL THE APPLICANT HAS SATISFIED ALL APPLICABLE STATE REGULATIONS REGARDING GOPHER TORTOISES, A THREATENED SPECIES [68A-27.003, F.A.C.; SEC. 125.022(5) F.S.]. THIS WILL INCLUDE AN ADDITIONAL GT SURVEY OF THE 5-ACRE PROJECT LIMITS WITHIN 90-DAYS PRIOR TO SCHEDULED CONSTRUCTION ACTIVITIES, AND COORDINATION WITH FWC CONCERNING DECISIONS ON APPROPRIATE ON-SITE RELOCATION WITHIN THE COUNTY'S CUSCOWILLA PROPERTY AND/OR OFF-SITE RELOCATION OPTIONS. SINCE THE PROJECT IS BEING CONDUCTED ON COUNTY-OWNED PROPERTY, ALL GT CORRESPONDENCE WITH FWC AND/OR OTHER REPRESENTATIVES WILL INCLUDE COPYING EPD STAFF INCLUDING APPLICABLE STATE PERMITS, AND IF APPLICABLE, RELOCATION ACTIVITIES COMPLETED PRIOR TO THE COUNTY CAN ISSUE THE CONSTRUCTION PERMIT (SEC. 406.05, ULDC; SEC. 406.28, ULDC).
2. PRIOR TO COMMENCING CONSTRUCTION, THE APPLICANT MUST SUBMIT DOCUMENTATION OF COORDINATION AND COMMENTS FROM THE FLORIDA DIVISION OF HISTORIC RESOURCES (DHR) (SEC. 406.77, ULDC; SEC. 406.82, JLDC). DUE TO THE PROPOSED PROJECT SITE BEING LOCATED IN AN AREA OF HIGH ARCHAEOLOGICAL SITE POTENTIAL, AT THIS TIME, IT IS RECOMMENDED THAT PROFESSIONAL ARCHAEOLOGICAL MONITORING OCCUR DURING ALL GROUND—DISTURBING CONSTRUCTION ACTIVITIES. SHOULD ANY RESOURCES BE ENCOUNTERED DURING CONSTRUCTION, THE APPLICANT WILL CONTACT ACEPD AND DHR IMMEDIATELY AND ALL WORK WILL STOP UNTIL A FORMAL ARCHEOLOGICAL ASSESSMENT IS COMPLETED IN COORDINATION WITH ACEPD AND DHR.

# LEGAL DESCRIPTION

NINE (9) OF THE MOSES E. LEVY GRANT, AS PER PLAT THEREOF, RECORDED IN DEED BOOK "J", PAGE 645 OF THE PUBLIC RECORDS OF ALACHUA COUNTY, FLORIDA; BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT A 4" X 4" CONCRETE MONUMENT (PERRY C. MCGRIFF, R.L.S. 509) AT THE NORTHWEST CORNER OF LOT 39 OF THE LEITNER TRACT, BEING A SUBDIVISION OF LOTS EIGHT (8) AND NINE (9) OF THE MOSES E. LEVY GRANT, AS PER PLAT THEREOF, RECORDED IN DEED BOOK "J", PAGE 645 OF THE PUBLIC RECORDS OF ALACHUA COUNTY, FLORIDA AND RUN THENCE SOUTH 86°21'54" EAST, ALONG THE NORTH LINE OF SAID LOT 39 AND ALONG THE SOUTH LINE OF LOT 22 OF SAID LEITNER TRACT, A DISTANCE OF 852.13 FEET TO THE POINT OF BEGINNING; THENCE CONTINUE SOUTH 86°21'54" EAST, ALONG SAID NORTH AND SOUTH LINES, 157.66 FEET TO A 34" IRON PIPE (NO ID.); THENCE NORTH 38°04'03" EAST, 97.34 FEET TO A POINT ON THE SOUTHWESTERLY RIGHT OF WAY LINE OF STATE ROAD NO. 25 (U.S. HIGHWAY NO. 441, 174' RIGHT OF WAY); THENCE SOUTH 52°08'50" EAST, ALONG SAID RIGHT OF WAY LINE, 307.08 FEET TO A POINT ON THE EAST LINE OF SAID LOT 39 AND THE WEST LINE OF LOT 38 OF SAID LEITNER TRACT; THENCE SOUTH 03°40'39" WEST, ALONG SAID EAST AND WEST LINES, 372.86 FEET; THENCE NORTH 86°21'54"

WEST, PARALLEL WITH SAID NORTH AND SOUTH LINES, 466.70 FEET; THENCE NORTH 03'40'39" EAST PARALLEL WITH SAID EAST AND WEST LINES, 465.26 FEET TO THE POINT OF BEGINNING.

# SPECIAL USE PERMIT Z-23-04 CONDITIONS AND RESPONSES

- 1. THIS SPECIAL USE PERMIT SHALL ALLOW A FIRE/RESCUE STATION ON THE PORTION OF PARCEL 16392-000-000 FOUND IN THE LEGAL DESCRIPTION ATTACHED TO THE RESOLUTION.

  RESPONSE: THE DEVELOPMENT PLAN PROPOSES THE USE THAT IS ALLOWED IN THIS CONDITION.
- 2. REFUSE AND SERVICE AREAS SHALL BE LOCATED TO THE REAR OF THE MAIN BUILDING.

  RESPONSE: THE DEVELOPMENT PLAN IS DESIGNED TO PROVIDE THE REFUSE AND SERVICE AREA TO THE REAR OF THE MAIN BUILDING.
- 3. NO CLEARING OR CONSTRUCTION ACTIVITIES CAN COMMENCE UNTIL THE APPLICANT HAS SATISFIED ALL APPLICABLE STATE REGULATIONS REGARDING GOPHER TORTOISES. THIS WILL INCLUDE AN ADDITIONAL GT SURVEY OF THE 5-ACRE PROJECT LIMITS WITHIN 90-DAYS PRIOR TO SCHEDULED CONSTRUCTION ACTIVITIES, AND COORDINATION WITH FWC CONCERNING DECISIONS ON APPROPRIATE ON-SITE RELOCATION WITHIN THE COUNTY'S CUSCOWILLA PROPERTY AND/OR OFF-SITE RELOCATION OPTIONS. SINCE THE PROJECT IS BEING CONDUCTED ON COUNTY-OWNED PROPERTY, ALL THE GT CORRESPONDENCE WITH FWC AND/OR OTHER REPRESENTATIVES WILL INCLUDE COPYING EPD STAFF INCLUDING APPLICABLE STATE PERMITS, AND IF APPLICABLE, RELOCATION ACTIVITIES COMPLETED PRIOR TO THE COUNTY CAN ISSUE A CONSTRUCTION PERMIT.

RESPONSE: UNDERSTOOD. COORDINATION WITH COUNTY STAFF WILL OCCUR TO PROVIDE THIS INFORMATION PRIOR TO ANY CLEARING OR CONSTRUCTION ACTIVITIES.

4. SILT SCREEN FENCING IS REQUIRED ALONG THE PERIMETER BOUNDARY OF THE CONSTRUCTION AREA, AND THE FENCING LOCATIONS ARE REQUIRED TO BE DEPICTED ON THE SEDIMENTATION AND EROSION CONTROL PLAN SHEET PRESENTED ON A PLAN SHEET PLAN. PRIOR TO CONDUCTING ANY VEGETATION CLEARING ACTIVITIES, THE APPROVED PROJECT BOUNDARIES WILL BE DELINEATED WITH FLAGGING TAPE RIBBON AT APPROPRIATE DISTANCE SO RIBBONS CAN BE VIEWED, HOWEVER, PLACED AT INTERVALS NO FURTHER THAN 100 FT. APART TO DESIGNATE THE LIMITS OF CLEARING AND CONSTRUCTION ACTIVITIES FOR THE PROJECT. REMOVAL OF VEGETATION IS RESTRICTED TO WITHIN A MAXIMUM 15 FT. INSIDE—WIDTH OF THE FLAGGED PERIMETER TO ALLOW WALKING AND EQUIPMENT ACCESS TO INSTALL SILT—SCREEN FENCING ALONG THE PROJECT BOUNDARY. AFTER INSTALLATION OF THE PERIMETER SILT—FENCE, CLEARING AND GRADING ACTIVITIES CAN COMMENCE WITHIN THE PROJECT BOUNDARY EXCEPT FOR TREES AND OTHER FEATURES DESIGNATED FOR PROTECTION AND PRESERVATION.

RESPONSE: THE DEVELOPMENT PLAN INCLUDES THE REQUIRED SILT SCREEN FENCING AS REQUIRED IN THIS CONDITION.

5. IF A SECURITY FENCE IS NOT INSTALLED, CONSERVATION SIGNAGE WILL BE NECESSARY PRIOR TO ISSUANCE OF THE CERTIFICATE OF OCCUPANCY.

<u>RESPONSE:</u> A SECURITY FENCE IS NOT PROPOSED BUT CONSERVATION SIGNAGE IS INCLUDED ON THE PLANS AS INDICATED BY EPD.

DRAWING INDEX							
SHEET NUMBER	EET NUMBER SHEET TITLE						
C100	COVER SHEET						
C110	LEGEND, SYMBOLS AND NOTES						
P000	SUP MASTER PLAN						
C120	DEMOLITION PLAN						
C130	TREE CANOPY AND PRESERVATION PLAN						
C200	DIMENSION PLAN						
C300	PAVING, GRADING AND DRAINAGE PLAN						
C310	BASIN DETAIL						
C320	STORMWATER POLLUTION PREVENTION PLAN						
C330	PAVING, GRADING DETAILS AND NOTES						
V001-V003	TOPOGRAPHIC SURVEY						



EB 2389 720 S.W. 2nd Ave, South Tower, Suite 300 GAINESVILLE, FLORIDA 32601 TEL. (352) 373-3541 www.edafl.com permitting@edafl.com

No.	Date	Comment

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY CLAUDIA S. VEGA, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Professional Engineer of Record:

Claudia S. Vega, P.E. 51532
Engineer Certificate No.

23-052
Project phase:

PRELIMINARY/FINAL

Project title:

ALACHUA COUNTY

CUSCOWILLA FIRE RESCUE

STATION PHASE 1
PRELIMINARY AND FINAL
DEVELOPMENT PLAN
ALACHUA COUNTY, FLORIDA

Sheet title:

COVER SHEET

Designed: CSV Sheet

Drawn: MAB/NJG

Checked: QH

Date: 04/25/24

C100

EXISTING CONTOUR ELEVATION

### **GENERAL NOTES**

- 1. LOCATIONS, ELEVATIONS, AND DIMENSIONS OF EXISTING UTILITIES, STRUCTURES AND OTHER FEATURES ARE SHOWN ACCORDING TO THE BEST INFORMATION AVAILABLE AT THE TIME OF PREPARATION OF THESE PLANS. THE CONTRACTOR SHALL VERIFY THE LOCATIONS. ELEVATIONS, AND DIMENSIONS OF ALL EXISTING UTILITIES, STRUCTURES AND OTHER FEATURES, AFFECTING THIS WORK, PRIOR TO
- 2. PRIOR TO THE INITIATION OF SITE CONSTRUCTION, THE CONTRACTOR SHALL VERIFY ANY EXISTING UTILITIES INCLUDING GAS, WATER, ELECTRIC, CABLE TV. COMMUNICATIONS, SANITARY SEWERS AND STORM DRAINAGE SYSTEMS, ON AND/OR ADJACENT TO THE SITE. REMOVE OR CAP AS NECESSARY. CONTACT ENGINEER OF RECORD IMMEDIATELY WITH ANY DISCREPANCIES.
- 3. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY DAMAGE TO EXISTING FACILITIES, ABOVE OR BELOW GROUND, THAT MAY OCCUR AS A RESULT OF THE WORK PERFORMED, BY THE CONTRACTOR OR SUB-CONTRACTORS, AS CALLED FOR IN THESE CONTRACT DOCUMENTS.
- 4. CONTRACTOR TO COORDINATE WITH UTILITY COMPANIES FOR THE RELOCATION OF EXISTING UTILITIES. UTILITIES NEEDING TO BE REMOVED OR RELOCATED SHALL BE COORDINATED WITH THE AFFECTED UTILITY COMPANY. ADEQUATE TIME SHALL BE PROVIDED FOR RELOCATION, AND CLOSE COORDINATION WITH THE UTILITY COMPANY IS NECESSARY TO PROVIDE A SMOOTH TRANSITION IN UTILITY SERVICE. THE CONTRACTOR SHALL COORDINATE WITH THE UTILITY COMPANY CONCERNING PORTIONS OF THE WORK WHICH MAY BE PERFORMED BY THE UTILITY COMPANY'S FORCES AND ANY FEES WHICH ARE TO BE PAID TO THE UTILITY COMPANY FOR THEIR SERVICES. THE CONTRACTOR IS RESPONSIBLE FOR PAYING ALL FEES AND
- 5. IT IS THE CONTRACTOR'S RESPONSIBILITY TO BECOME FAMILIAR WITH THE PERMIT AND INSPECTION REQUIREMENTS SPECIFIED BY THE VARIOUS GOVERNMENTAL AGENCIES AND THE ENGINEER. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS PRIOR TO CONSTRUCTION, AND SCHEDULE INSPECTIONS ACCORDING TO AGENCY INSTRUCTION/REQUIREMENTS.
- 6. THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS, ON ALL PRECAST AND MANUFACTURED ITEMS, TO THE OWNER'S ENGINEER FOR REVIEW. FAILURE TO OBTAIN APPROVAL BEFORE INSTALLATION MAY RESULT IN REMOVAL AND REPLACEMENT AT THE CONTRACTOR'S EXPENSE.
- A. DURING THE CONSTRUCTION AND/OR MAINTENANCE OF THIS PROJECT, ALL SAFETY REGULATIONS ARE TO BE ENFORCED. THE CONTRACTOR OR HIS REPRESENTATIVE SHALL BE RESPONSIBLE FOR THE CONTROL AND SAFETY OF
- THE TRAVELING PUBLIC AND THE SAFETY OF HIS/HER PERSONNEL. B. LABOR SAFETY REGULATIONS SHALL CONFORM TO THE PROVISIONS SET FORTH
- C. THE MINIMUM STANDARDS AS SET FORTH IN THE CURRENT EDITION OF "THE STATE OF FLORIDA, MANUAL ON TRAFFIC CONTROL AND SAFE PRACTICES FOR STREET AND HIGHWAY CONSTRUCTION, MAINTENANCE AND UTILITY OPERATIONS' SHALL BE FOLLOWED IN THE DESIGN, APPLICATION, INSTALLATION, MAINTENANCE AND REMOVAL OF ALL TRAFFIC CONTROL DEVICES, WARNING DEVICES AND BARRIERS NECESSARY TO PROTECT THE PUBLIC AND CONSTRUCTION PERSONNEL FROM HAZARDS WITHIN THE PROJECT LIMITS.
- ALL TRAFFIC CONTROL MARKINGS AND DEVICES SHALL CONFORM TO THE PROVISIONS SET FORTH IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES PREPARED BY THE U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION
- E. ALL SUBSURFACE CONSTRUCTION SHALL COMPLY WITH THE "TRENCH SAFETY ACT". THE CONTRACTOR SHALL INSURE THAT THE METHOD OF TRENCH PROTECTION AND CONSTRUCTION IS IN COMPLIANCE WITH THE OCCUPATIONAL
- SAFETY AND HEALTH ADMINISTRATION (OSHA) REGULATIONS. F. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO COMPLY AND ENFORCE ALL APPLICABLE SAFETY REGULATIONS. THE ABOVE INFORMATION HAS BEEN PROVIDED FOR THE CONTRACTOR'S INFORMATION ONLY AND DOES NOT IMPLY THAT THE OWNER OR ENGINEER WILL INSPECT AND/OR ENFORCE SAFETY
- 8. ALL UNDERGROUND UTILITIES MUST BE IN-PLACE, TESTED AND INSPECTED PRIOR TO BASE AND SURFACE CONSTRUCTION.
- 9. CONTRACTOR IS REQUIRED TO SECURE A FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION (FDEP) "NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM" (NPDES) PERMIT BEFORE BEGINNING CONSTRUCTION.
- 10. A COMPLETE SET OF PERMITTED DRAWINGS AND SPECIFICATIONS MUST BE MAINTAINED ON SITE AT ALL TIMES THAT THE CONTRACTOR IS PERFORMING WORK. THESE DRAWINGS SHALL BE MADE AVAILABLE UPON REQUEST.
- 11. ALL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE CONSTRUCTED SIMULTANEOUSLY WITH THE DISTURBANCE OF THE LAND AND SHALL REMAIN FUNCTIONAL UNTIL THE CONTRIBUTING DISTURBED AREAS ARE STABILIZED. SILT BARRIERS WILL BE INSTALLED AS NECESSARY TO PREVENT EXCESSIVE SEDIMENTATION OF DOWNSTREAM AREAS.
- 12. COUNTY: ALL WORK WITHIN OR ON COUNTY OWNED AND MAINTAINED FACILITIES, ROW OR EASEMENTS WILL REQUIRE AS-BUILT PLANS. AS-BUILT PLANS SHOULD SHOW THE CONSTRUCTED CONDITIONS OF THE COUNTY OWNED OR MAINTAINED AREA AND BE PERFORMED BY A FLORIDA LICENSED PROFESSIONAL SURVEYOR AND MAPPER. COORDINATE SYSTEM SHALL BE FLORIDA STATE PLANE COORDINATES, NAD 83 ZONE NORTH US SURVEY FEET. VERTICAL COORDINATES SHALL BE REFERENCED TO THE NAVD 88 DATUM WITH ELEVATIONS GIVEN IN US SURVEY FEET.
- 13. THE CONTRACTOR SHALL CONSTRUCT GRAVITY SEWER LATERALS, MANHOLES GRAVITY SEWER LINES AND DOMESTIC WATER AND FIRE PROTECTION SYSTEM AS SHOWN ON THESE PLANS. THE CONTRACTOR SHALL FURNISH ALL NECESSARY MATERIALS, EQUIPMENT, MACHINERY, TOOLS, MEANS OF TRANSPORTATION AND LABOR NECESSARY TO COMPLETE THE WORK IN FULL AND COMPLETE ACCORDANCE WITH THE SHOWN, DESCRIBED AND REASONABLY INTENDED REQUIREMENTS OF THE CONTRACT DOCUMENTS AND JURISDICTIONAL AGENCY REQUIREMENTS. IN THE EVENT THAT THE CONTRACT DOCUMENTS AND THE JURISDICTIONAL AGENCY REQUIREMENTS ARE NOT IN AGREEMENT, THE MOST STRINGENT SHALL GOVERN.

# **DEMOLITION NOTES**

- 1. ALL MATERIAL REMOVED FROM THIS SITE BY THE CONTRACTOR SHALL BE DISPOSED OF BY THE CONTRACTOR IN A LEGAL MANNER.
- 2. REFER TO THE TOPOGRAPHIC SURVEY FOR ADDITIONAL DETAILS OF EXISTING STRUCTURES, ETC., LOCATED WITHIN THE PROJECT SITE. UNLESS OTHERWISE NOTED, ALL EXISTING BUILDINGS, STRUCTURES, SLABS, CONCRETE, ASPHALT, DEBRIS PILES, SIGNS. AND ALL APPURTENANCES ARE TO BE REMOVED FROM THE SITE BY THE CONTRACTOR AND PROPERLY DISPOSED OF IN A LEGAL MANNER AS PART OF THIS CONTRACT. SOME ITEMS TO BE REMOVED MAY NOT BE DEPICTED ON THE TOPOGRAPHIC SURVEY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VISIT THE SITE AND DETERMINE THE FULL EXTENT OF ITEMS TO BE REMOVED. IF ANY ITEMS ARE IN QUESTION, THE CONTRACTOR SHALL CONTACT THE OWNER PRIOR TO REMOVAL OF
- 3. THE CONTRACTOR SHALL REFER TO THE DEMOLITION PLAN FOR DEMOLITION / PRESERVATION OF EXISTING TREES. ALL TREES NOT SPECIFICALLY SHOWN TO BE PRESERVED OR RELOCATED SHALL BE REMOVED AS A PART OF THIS CONTRACT. TREE PROTECTION FENCING SHALL BE INSTALLED PRIOR TO ANY DEMOLITION.
- 4. CONTRACTOR SHALL SUBMIT DEMOLITION SCHEDULE TO OWNER PRIOR TO PROCEEDING WITH DEMOLITION ACTIVITIES.
- 5. CONDUCT SITE DEMOLITION OPERATIONS TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS, AND OTHER ADJACENT OCCUPIED OR USED FACILITIES. DO NOT CLOSE OR OBSTRUCT STREETS, WALKS, OR OTHER OCCUPIED OR USED FACILITIES WITHOUT PERMISSION FROM AUTHORITIES HAVING JURISDICTION. CLOSURE OF THESE FACILITIES MAY REQUIRE A MAINTENANCE OF TRAFFIC PLAN PREPARED BY A REGISTERED PROFESSIONAL AT THE CONTRACTORS EXPENSE.
- 6. PROVIDE PROTECTION AS NECESSARY TO PREVENT DAMAGE TO EXISTING IMPROVEMENTS SHOWN IN THE PLANS TO REMAIN.
- 7. LOCATE EXISTING ABOVE GROUND AND UNDERGROUND UTILITIES IN AREAS OF WORK. IF UTILITIES ARE TO REMAIN IN PLACE, PROVIDE ADEQUATE MEANS OF SUPPORT AND PROTECTION DURING DEMOLITION AND CONSTRUCTION OPERATIONS.
- 8. CONTRACTOR SHALL COORDINATE WITH APPLICABLE UTILITY COMPANIES FOR THE TERMINATION, CAPPING-OFF AND REMOVAL OF ALL EXISTING UNDERGROUND AND ABOVE GROUND UTILITY SERVICES UNLESS DIRECTED TO OTHERWISE.

### **CONSTRUCTION NOTES**

- 1. SIGNS AND BARRICADES SHALL BE IN ACCORDANCE WITH THE U.S. DEPARTMENT OF TRANSPORTATION'S "MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES", AND THE FLORIDA DEPARTMENT OF TRANSPORTATION'S 'ROADWAY AND TRAFFIC DESIGN STANDARDS"INDEXES 600 THROUGH 685 (LATEST EDITIONS).
- 2. SAFE PEDESTRIAN TRAFFIC IS TO BE MAINTAINED AT ALL TIMES.
- 3. ANY SIDEWALK WHICH BECOMES UNDERMINED MUST BE REMOVED AND REPLACED. SIDEWALKS ARE TO BE RECONSTRUCTED WITHIN THREE (3) DAYS AFTER REMOVAL. WHEN EXISTING SIDEWALK IS REMOVED, IT IS TO BE REMOVED TO THE NEAREST
- 4. DISTURBED AREA WITHIN THE R-O-W WILL BE COMPACTED TO 98% OF MAXIMUM DENSITY AND SODDED.
- 5. STOCKPILING OF MATERIAL IS NOT ALLOWED ON ROADWAYS OR SIDEWALKS. ALL DIRT AND DEBRIS WILL BE REMOVED FROM JOB SITE DAILY. ROADS AND SIDEWALKS ARE TO BE SWEPT DAILY AS PART OF DAILY CLEANUP.
- 6. ANY PORTION OF ROADWAYS OR SIDEWALKS THAT SUSTAIN EXCESSIVE CONSTRUCTION RELATED DAMAGE, IN THE OPINION OF APPLICABLE AGENCIES, SHALL BE REPAIRED AT CONTRACTOR EXPENSE IN A MANNER SPECIFIED BY THAT
- CONSTRUCTION MUST BE PER THE APPROVED SITE PLAN OF THE DRC (OR EQUIVALENT). DEVIATIONS IN ROADWAY, UTILITY OR DRAINAGE CONSTRUCTION WILL REQUIRE PRIOR WRITTEN APPROVAL OF THE COUNTY ENGINEER OR THE DIRECTOR OF PUBLIC SERVICES (OR EQUIVALENT). NOTE: SIGNIFICANT CHANGES FROM THE DRC APPROVED PLAN MAY REQUIRE THE OWNER/DEVELOPER TO SUBMIT A REVISED SITE PLAN FOR REVIEW THROUGH THE DRC AND MAY CAUSE PROJECT DELAYS.
- 8. OFF-SITE OR ROADWAY R-O-W CONSTRUCTION SHALL BE IN ACCORDANCE WITH ALL CONDITIONS OF THE APPROVED R-O-W PERMIT(S). A COPY OF THE APPROVED R-O-W PERMIT MUST BE KEPT ON-SITE AND READILY AVAILABLE DURING ALL CONSTRUCTION ACTIVITIES WITHIN THE R-O-W.
- 9. DURING THE CONSTRUCTION AND/OR MAINTENANCE OF THIS PROJECT, ALL SAFETY REGULATIONS ARE TO BE ENFORCED. THE CONTRACTOR OR HIS REPRESENTATIVE SHALL BE RESPONSIBLE FOR THE CONTROL AND SAFETY OF THE TRAVELING PUBLIC AND THE SAFETY OF HIS/HER PERSONNEL.
- 10. ALL CONSTRUCTION, MATERIALS AND WORKMANSHIP ARE TO BE IN ACCORDANCE WITH FLORIDA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS AND STANDARDS.
- 11. CONTRACTOR IS RESPONSIBLE FOR CHECKING ACTUAL SITE CONDITIONS BEFORE STARTING CONSTRUCTION.
- 12. ANY DISCREPANCIES ON THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE COMMENCING WORK.
- 13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL REQUIRED CONSTRUCTION PERMITS AND BONDS IF REQUIRED PRIOR TO CONSTRUCTION.
- 14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUBMITTING TO THE ENGINEER A CERTIFIED RECORD SURVEY SIGNED AND SEALED BY A PROFESSIONAL LAND SURVEYOR REGISTERED IN THE STATE OF FLORIDA DEPICTING THE ACTUAL FIELD LOCATION OF ALL CONSTRUCTED IMPROVEMENTS THAT ARE REQUIRED BY THE JURISDICTIONAL AGENCIES FOR THE CERTIFICATION PROCESS. ALL SURVEY COSTS WILL BE THE CONTRACTORS RESPONSIBILITY. BOTH PAPER AND AUTOCAD FILES
- 15. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DOCUMENTING AND MAINTAINING AS-BUILT INFORMATION WHICH SHALL BE RECORDED AS CONSTRUCTION PROGRESSES OR AT THE COMPLETION OF APPROPRIATE CONSTRUCTION INTERVALS AND SHALL BE RESPONSIBLE FOR PROVIDING AS-BUILT DRAWINGS TO THE OWNER AND ENGINEER OF RECORD FOR THE PURPOSE OF CERTIFICATION TO JURISDICTIONAL AGENCIES AS REQUIRED. BOTH PAPER AND AUTOCAD SHALL BE PROVIDED.

# **EROSION CONTROL NOTES**

- THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) IS COMPRISED OF THE FROSION CONTROL PLAN THE STANDARD DETAILS THE PLAN NARRATIVE ATTACHMENTS REFERENCED BY THE SWPPP, PLUS THE PERMIT AND ALL SUBSEQUENT REPORTS AND RELATED DOCUMENTS.
- 2. ALL CONTRACTORS AND SUBCONTRACTORS INVOLVED WITH STORM WATER POLLUTION PREVENTION SHALL OBTAIN A COPY OF THE STORM WATER POLLUTION PREVENTION PLAN AND THE STATE OF FLORIDA NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM GENERAL PERMIT (NPDES PERMIT) AND BECOME FAMILIAR WITH
- THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES AS REQUIRED BY THE SWPPP. ADDITIONAL BEST MANAGEMENT PRACTICES SHALL BE IMPLEMENTED AS DICTATED BY CONDITIONS AT NO ADDITIONAL COST TO THE OWNER THROUGHOUT ALL PHASES OF CONSTRUCTION.
- PERMITS FOR ANY CONSTRUCTION ACTIVITY IMPACTING STATE WATERS OR REGULATED WETLANDS MUST BE MAINTAINED ON SITE AT ALL TIMES.
- 5. ALL WASH WATER (CONCRETE TRUCKS, VEHICLE CLEANING, EQUIPMENT CLEANING, ETC.) SHALL BE DETAINED AND PROPERLY TREATED OR DISPOSED.
- SUFFICIENT OIL AND GREASE ABSORBING MATERIALS AND FLOTATION BOOMS SHALL BE MAINTAINED ON SITE OR READILY AVAILABLE TO CONTAIN AND CLEAN-UP FUEL OR CHEMICAL SPILLS AND LEAKS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR DUST CONTROL ON SITE. THE USE OF MOTOR OILS AND OTHER PETROLEUM BASED OR TOXIC LIQUIDS FOR DUST SUPPRESSION OPERATIONS IS PROHIBITED.
- RUBBISH, TRASH, GARBAGE, LITTER, OR OTHER SUCH MATERIALS SHALL BE DEPOSITED INTO SEALED CONTAINERS. MATERIALS SHALL BE PREVENTED FROM
- LEAVING THE PREMISES THROUGH THE ACTION OF WIND OR STORM WATER RUNOFF
- 9. ALL STORM WATER POLLUTION PREVENTION MEASURES PRESENTED ON THE PLAN SHALL BE INITIATED AS SOON AS PRACTICABLE.
- 10. DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY HAS PERMANENTLY STOPPED SHALL BE PERMANENTLY SEEDED. THESE AREAS SHALL BE SEEDED NO LATER THAN 7 DAYS AFTER THE LAST CONSTRUCTION ACTIVITY OCCURRED IN THESE AREAS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING SEDIMENT IN THE DETENTION POND AND ANY SEDIMENT THAT MAY HAVE COLLECTED IN THE STORM DRAINS IN CONJUNCTION WITH THE STABILIZATION OF THE SITE.
- 12. ON-SITE & OFF SITE SOIL STOCKPILE AND BORROW AREAS SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION THROUGH IMPLEMENTATION OF BEST MANAGEMENT PRACTICES. STOCKPILE AND BORROW AREA LOCATIONS SHALL BE NOTED ON THE EROSION CONTROL PLAN BY THE CONTRACTOR AND PERMITTED IN ACCORDANCE WITH GENERAL PERMIT REQUIREMENTS.
- 13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADJUSTING THE EROSION CONTROL MEASURES (SILT FENCES, STABILIZATION, SEDIMENT BASINS, ETC.) AS NEEDED FOR EACH STAGE OF SITE WORK / GRADING.
- 14. NO GRADING, CUTTING, OR FILLING SHALL COMMENCE UNTIL SUCH TIME AS APPROPRIATE EROSION AND SEDIMENTATION CONTROL DEVICES HAVE BEEN INSTALLED BETWEEN ALL DISTURBED AREAS AND WATER BODIES, WATERCOURSES OR WETLANDS AND ANY CONVEYANCES SUCH AS DRAINAGE DITCHES, STORM DRAINS, AND INLETS.
- 15. ALL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE INSTALLED PRECEEDING ANY DISTURBANCE OF THE LAND AND SHALL REMAIN FUNCTIONAL UNTIL THE CONTRIBUTING DISTURBED AREAS ARE STABILIZED. THE CONTRACTOR SHALL INSTALL ALL EROSION AND PREVENTION STRUCTURES SHOWN ON THE PLANS AT A MINIMUM AND IN FULL CONFORMANCE WITH ALL APPLICABLE WATER MANAGEMENT DISTRICT PERMITS AND REGULATIONS.
- 16. ALL CONTROL STRUCTURE AND OUTFALL CULVERT INSTALLATIONS SHALL BE PROTECTED WITH SEDIMENT BARRIERS AT A MINIMUM.
- 17. ALL DISTURBED AREAS (ABOVE NORMAL WATER LEVELS) UNLESS OTHERWISE NOTED HEREIN, SHALL BE SEEDED AND MULCHED WITHIN 7 DAYS OF FINAL GRADING. UNLESS OTHERWISE NOTED, ALL SLOPES STEEPER THAN 4:1 SHALL BE SODDED.

# **PAVING. GRADING. AND DRAINAGE NOTES**

- TRAFFIC CONTROL ON ALL FDOT, LOCAL AND COUNTY RIGHTS-OF-WAY SHALL MEET THE REQUIREMENTS OF THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (U.S. DOT/FHA) AND THE REQUIREMENTS OF THE STATE AND ANY LOCAL AGENCY HAVING JURISDICTION. IN THE EVENT THAT THE CONTRACT DOCUMENTS AND THE JURISDICTIONAL AGENCY REQUIREMENTS ARE NOT IN AGREEMENT, THE MOST STRINGENT SHALL GOVERN.
- 2. ALL OPEN AREAS WITHIN THE PROJECT SITE SHALL BE SODDED UNLESS INDICATED OTHERWISE ON THE
- 3. THE CONTRACTOR SHALL INSTALL FILTER FABRIC OVER ALL DRAINAGE STRUCTURES FOR THE DURATION OF CONSTRUCTION AND UNTIL ACCEPTANCE OF THE PROJECT BY THE OWNER. ALL DRAINAGE STRUCTURES SHALL BE CLEANED OF DEBRIS AS REQUIRED DURING AND AT THE END OF CONSTRUCTION TO PROVIDE POSITIVE
- 4. IF DEWATERING IS REQUIRED, THE CONTRACTOR SHALL OBTAIN ANY APPLICABLE REQUIRED PERMITS. THE CONTRACTOR IS TO COORDINATE WITH THE OWNER AND THE DESIGN ENGINEER PRIOR TO ANY EXCAVATION.
- THE CONTRACTOR MUST REVIEW AND MAINTAIN A COPY OF THE ENVIRONMENTAL RESOURCE PERMIT COMPLETE WITH ALL CONDITIONS, ATTACHMENTS, EXHIBITS, AND PERMIT MODIFICATIONS IN GOOD CONDITION AT THE CONSTRUCTION SITE. THE COMPLETE PERMIT MUST BE AVAILABLE FOR REVIEW UPON REQUEST BY WATER MANAGEMENT DISTRICT REPRESENTATIVES.
- THE CONTRACTOR SHALL ENSURE THAT ISLAND PLANTING AREAS AND OTHER PLANTING AREAS ARE NOT COMPACTED AND DO NOT CONTAIN ROAD BASE MATERIALS. THE CONTRACTOR SHALL ALSO EXCAVATE AND REMOVE ALL UNDESIRABLE MATERIAL FROM ALL AREAS ON THE SITE TO BE PLANTED AND PROPERLY DISPOSED OF IN A LEGAL MANNER.
- 7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXCAVATIONS AGAINST COLLAPSE AND WILL PROVIDE BRACING, SHEETING OR SHORING AS NECESSARY. DE-WATERING METHODS SHALL BE USED AS REQUIRED TO KEEP TRENCHES DRY WHILE PIPE AND APPURTENANCES ARE BEING PLACED.
- 8. THE CONTRACTOR WILL STABILIZE BY SEED AND MULCH, SOD, OR OTHER APPROVED MATERIALS ANY DISTURBED AREAS WITHIN ONE WEEK FOLLOWING CONSTRUCTION OF THE UTILITY SYSTEMS AND PAVEMENT AREAS. CONTRACTOR SHALL MAINTAIN SUCH AREAS UNTIL FINAL ACCEPTANCE BY OWNER. CONTRACTOR TO COORDINATE WITH OWNER REGARDING TYPE OF MATERIAL, LANDSCAPING AND IRRIGATION IMPROVEMENTS TO
- 9. SITE GRADING, PAVING AND DRAINAGE MATERIALS AND CONSTRUCTION SHALL CONFORM TO FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
- 10. IMMEDIATELY AT ONSET OF CONSTRUCTION, CONTRACTOR SHALL FIELD VERIFY HORIZONTAL AND VERTICAL LOCATIONS OF ALL EXISTING UTILITIES CRITICAL TO COMPLETING THE PROJECT (INCLUDING WATER, SEWER, POWER, TELEPHONE, GAS, AND CABLE TV) AND SHALL EVALUATE POTENTIAL CONFLICTS. ALL SUCH CONFLICTS SHALL BE REPORTED TO ENGINEER/OWNER IMMEDIATELY UPON DISCOVERY.
- 11. PRIOR TO CONSTRUCTION, CONTRACTOR SHALL FIELD STAKE AND ROPE OFF CONSERVATION AREA LINES. OWNER RESERVES THE RIGHTS TO CHECK THE STAKING AND ROPING AND REQUIRE IT TO BE RELOCATED IF NECESSARY. IT SHALL REMAIN IN PLACE UNTIL ADJACENT CONSTRUCTION IS COMPLETE.
- 12. CONTRACTOR SHALL BE EXTREMELY CAUTIOUS WHEN WORKING NEAR TREES WHICH ARE TO BE SAVED, WHETHER SHOWN IN THE PLANS OR DESIGNATED IN THE FIELD.
- 13. ALL SIGNAGE, PAVEMENT MARKING AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH FDOT "ROADWAY AND TRAFFIC DESIGN STANDARDS" AND FHWA "MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES".
- 14. REGULATORY SIGNS (STOP, ETC.) SHALL BE PAID FOR BY THE CONTRACTOR AND IN PLACE PRIOR TO FINAL INSPECTION OF PAVING AND DRÁINAGE IMPROVEMENTS.
- 15. BLUE REFLECTIVE PAVEMENT MARKERS SHALL BE PLACED OPPOSITE FIRE HYDRANTS IN THE CENTER OF THE NEAREST TRAVELED LANE TO MARK THEIR LOCATIONS.
- 16. CONTRACTOR IS RESPONSIBLE FOR GRADING ALL PAVEMENTS TO DRAIN POSITIVELY. INTERSECTIONS SHALL BE TRANSITIONED TO PROVIDE SMOOTH DRIVING SURFACE WHILE MAINTAINING POSITIVE DRAINAGE. SHOULD AREAS OF POOR DRAINAGE BE OBSERVED, CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO PLACEMENT OF CURBS OR PAVEMENT COURSES, SO THAT RECOMMENDATIONS FOR CORRECTION MAY BE MADE.
- 17. PROPOSED AND EXISTING SIDEWALKS SHALL BE RAMPED FLUSH WITH PAVEMENT. RAMPS SHALL NOT EXCEED SLOPES OF 12 HORIZONTAL TO 1 VERTICAL.
- 18. FINISHED FLOOR ELEVATIONS ARE MINIMUM ELEVATIONS REQUIRED TO SATISFY DRAINAGE AND/OR 100-FLOODPLAIN REQUIREMENTS. PAD ELEVATIONS, IMMEDIATELY OUTSIDE OF BUILDING WALLS, SHALL BE NO MORE THAN 8 INCHES BELOW THE FINISHED FLOOR ELEVATIONS SHOWN.
- 19. CONTRACTOR IS RESPONSIBLE FOR IDENTIFYING AND DISPOSING ALL WASTE MATERIALS CONSISTENT WITH ALL RULES AND REGULATIONS APPLICABLE TO THE SPECIFIC MATERIAL FOUND. ALL DELETERIOUS SUBSURFACE MATERIAL (I.E. MUCK, PEAT, BURIED DEBRIS, ETC.) IS TO BE EXCAVATED AND REPLACED WITH SUITABLE/COMPACTED SOILS, AS DIRECTED BY THE OWNER, THE OWNERS ENGINEERS, OR OWNERS SOILS TESTING COMPANY. DELETERIOUS MATERIAL IS TO BE STOCKPILED OR REMOVED FROM THE SITE AS DIRECTED BY THE OWNER. EXCAVATED AREAS ARE TO BE BACKFILLED WITH APPROVED MATERIALS AND COMPACTED AS SHOWN ON THESE PLANS. CONTRACTOR IS RESPONSIBLE FOR ACQUIRING ANY PERMITS THAT ARE NECESSARY FOR REMOVING DELETERIOUS MATERIAL FROM THE SITE.
- 20. ALL NECESSARY FILL AND EMBANKMENT THAT IS PLACED DURING CONSTRUCTION SHALL CONSIST OF MATERIAL SPECIFIED BY THE OWNER'S SOILS TESTING COMPANY OR ENGINEER AND BE PLACED AND COMPACTED ACCORDING TO THESE PLANS.
- 21. PROPOSED SPOT ELEVATIONS REPRESENT FINISHED PAVEMENT, SIDEWALK, OR GROUND SURFACE GRADES,
- UNLESS OTHERWISE NOTED. 22. CURBING SHALL BE PLACED AT THE EDGES OF ALL PAVEMENT, UNLESS OTHERWISE NOTED. REFER TO THE LATEST EDITION OF F.D.O.T. "ROADWAY AND TRAFFIC DESIGN STANDARDS" FOR DETAILS AND SPECIFICATIONS ALL FDOT TYPE CURB AND GUTTERS CALLED FOR IN THESE PLANS.
- 23. THE CONTRACTOR SHALL RESTORE OFF-SITE CONSTRUCTION AREAS TO EQUAL AND/OR BETTER CONDITION THAN EXISTING PRIOR TO START OF CONSTRUCTION.
- 24. UNLESS OTHERWISE NOTED, GRADE TO MEET EXISTING ELEVATION AT PROPERTY LINES.

CONTRACTOR WILL BEAR ALL COSTS OF SAID RETESTING

- 25. SURVEY MONUMENTS OR BENCHMARKS, WHICH HAVE TO BE DISTURBED BY THIS WORK, SHALL BE REPLACED UPON COMPLETION OF WORK BY A REGISTERED LAND SURVEYOR. ALL SURVEY COSTS WILL BE CONTRACTORS
- 26. FINAL GRADES SHOWN INCLUDE SOD HEIGHT. ALL AREAS SHALL BE GRADED TO DRAIN AWAY FROM THE
- 27. IF WORK IS SUSPENDED OR DELAYED FOR 14 DAYS, THE CONTRACTOR SHALL TEMPORARILY STABILIZE THE DISTURBED AREAS AT NO ADDITIONAL COST TO THE OWNER.
- 28. STORM DRAINS SHALL BE REINFORCED CONCRETE PIPE, PER ASTM C-76 CLASS III, UNLESS OTHERWISE SPECIFIED. LIFTING HOLES ARE PROHIBITED.
- 29. ALL STORM STRUCTURES SHALL CONFORM WITH FDOT STANDARD INDEX DRAWINGS AND SPECIFICATIONS EXCEPT THAT DITCH BOTTOM INLETS IN PAVED AREAS SHALL HAVE TRAVERSABLE, TRAFFIC BEARING, GRATES SUPPORTED BY STEEL ANGLE SEATS OR SUPPORTED ON FOUR SIDES. GRATES SHALL BE CAST IRON UNLESS OTHERWISE SPECIFIED OR APPROVED.
- 30. ALL CONCRETE CURBS, SIDEWALKS, INLET TOPS, ETC. SHALL BE 3000 PSI MINIMUM, UNLESS OTHERWISE SPECIFIED.
- 31. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING APPLICABLE TESTING WITH THE SOILS ENGINEER. TESTS WILL BE REQUIRED PURSUANT WITH THE SOILS REPORT. UPON COMPLETION OF WORK THE SOILS ENGINEER WILL SUBMIT CERTIFICATIONS TO THE OWNER AND OWNER'S ENGINEER STATING THAT ALL REQUIREMENTS HAVE
- 32. A QUALIFIED TESTING LABORATORY SHALL PERFORM ALL TESTING NECESSARY TO ASSURE COMPLIANCE OF THE IN-PLACE MATERIALS AS REQUIRED BY THESE PLANS, THE VARIOUS AGENCIES AND PERMIT CONDITIONS. SHOULD ANY RETESTING BE REQUIRED DUE TO THE FAILURE OF ANY TESTS TO MEET THE REQUIREMENTS, THE
- 33. THE STORM DRAINAGE PIPING SYSTEM SHALL BE SUBJECT TO A VISUAL INSPECTION BY THE OWNER'S ENGINEER PRIOR TO THE PLACEMENT OF BACKFILL. CONTRACTOR TO NOTIFY THE ENGINEER 48 HOURS IN ADVANCE TO SCHEDULE INSPECTION.
- 34. THE CONTRACTOR SHALL MAINTAIN AND PROTECT FROM MUD, DIRT, DEBRIS, ETC. THE STORM DRAINAGE SYSTEM UNTIL FINAL ACCEPTANCE OF THE PROJECT. THE STORM SYSTEM WILL BE RE-INSPECTED BY THE OWNER'S ENGINEER PRIOR TO APPROVAL FOR CERTIFICATE OF OCCUPANCY PURPOSES. THE CONTRACTOR MAY BE REQUIRED TO RE-CLEAN PIPES AND INLETS FOR THESE PURPOSES.





720 S.W. 2nd Ave, South Tower, Suite 300 GAINESVILLE, FLORIDA 32601 TEL. (352) 373-3541 www.edafl.com permitting@edafl.com

Date Comment THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY

> PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Professional Engineer of Record:

Claudia S. Vega, P.E. Engineer Certificate No.

23-052 PRELIMINARY/FINAL


ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL

DEVELOPMENT PLAN ALACHUA COUNTY, FLORIDA

LEGEND, SYMBOLS AND NOTES

Designed: CSV Drawn: MAB/NJG hecked:

Date: 04/25/24

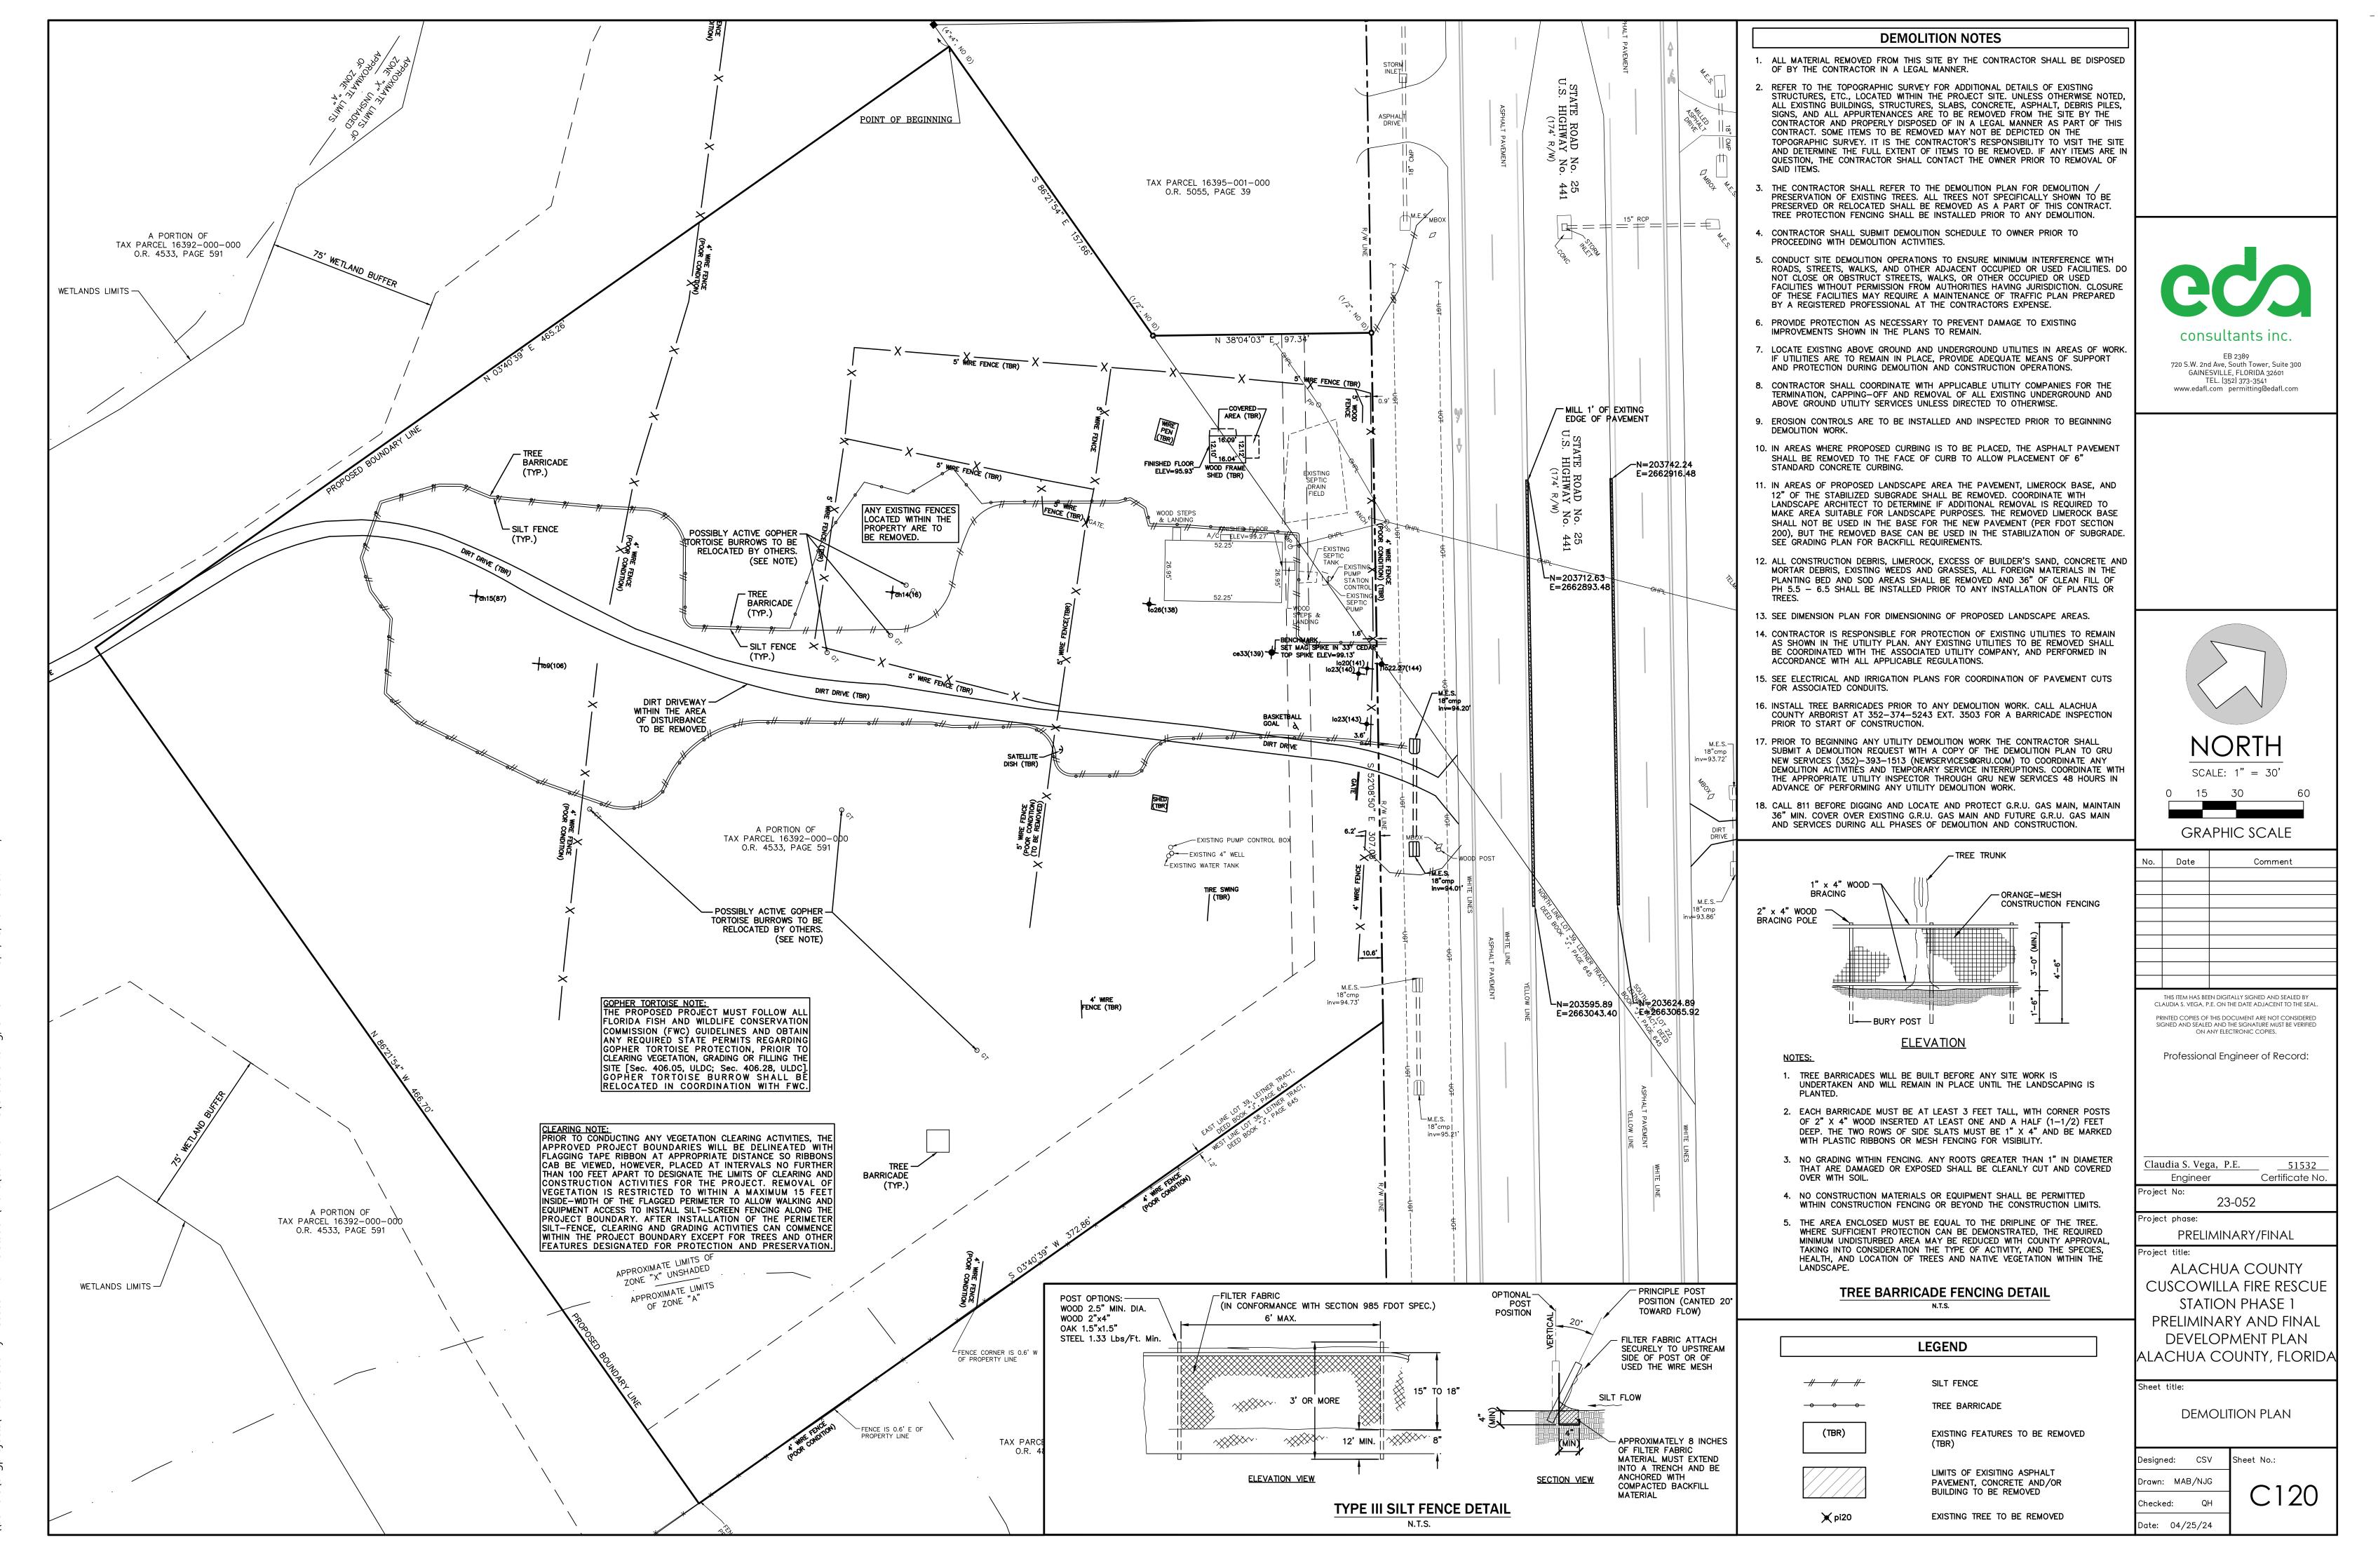

server3\engprojects\Alachua Countv - Cuscowilla Fire Station\Plans\Current DWG\C23052J1.dwg. C120 - DEMO. 4/25/2024 3:43:44 PM. TAR



EXISTING TREE CANOPY

4.32 AC. 100%

• pi20 **EXISTING TREE** 



EXISTING TREE CANOPY AND TREES 0.74 AC. 17.1% TO BE REMOVED AS PART OF PHASE 1



EXISTING TREE CANOPY AND TREES 1.46 AC. 33.8% TO BE REMOVED AS PART OF PHASE 2 NOTE: TREES IN THIS AREA WILL NOT BE REMOVED AS PART OF PHASE 1



EXISTING TREE CANOPY AND TREES 2.12 AC. 49.1% TO REMAIN AFTER COMPLETION OF



BOTH PHASES



DESIRABLE TREE TO REMAIN

X pi20 EXISTING TREE AREA TO BE REMOVED

# TREE LEGEND:

ONLY LAUREL OAKS & WATER OAKS WITH A DIAMETER OF 30" OR GREATER, PINES & SWEETGUMS WITH A DIAMETER OF 20" OR GREATER, FINES & SWEETGOMS WITH A DIAMETER OF 20" OR GREATER, AND OTHER TREES WITH A DIAMETER OF 8" OR GREATER WERE LOCATED FOR THIS SURVEY. (DIAMETER MEASURED 4.5' ABOVE GRADE) MARKED WITH AN ALUMINUM TAG AND A UNIQUE NUMBER



SIZE/COMMON NAME Genus species

ce33(139) = 33" SOUTHERN REDCEDAR Juniperus silicicola

ch15(87) = 15" BLACK CHERRY Prunus serotina

hi17(22) = 17" HICKORY Carya sp.

loo33(23) = 33" LAUREL OAK Quercus hemisphaerica

lo20(141) = 20" LIVE OAK Quercus virginiana

mg11(52) = 11" MAGNOLIA Magnolia grandiflora

po17(145) = 17" PALM Sabal palmetto

pi24(68) = 24" PINE Pinus sp.

sb20(8) = 20" SUGARBERRY Celtis laevigata

sg22(1) = 22" SWEETGUM Liquidambar styraciflua



consultants inc.

EB 2389 720 S.W. 2nd Ave, South Tower, Suite 300 GAINESVILLE, FLORIDA 32601 TEL. (352) 373-3541 www.edafl.com permitting@edafl.com



0 15 30

GRAPHIC SCALE

SCALE: 1'' = 30'

No. Date Comment

Professional Engineer of Record:

Engineer Certificate No. 23-052

Project phase:

PRELIMINARY/FINAL Project Atitle CHUA COUNTY

CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL DEVELOPMENT PLAN ALACHUA COUNTY, FLORIDA


TREE CANOPY AND PRESERVATION PLAN

Designed: CSV Drawn: MAB/NJG

Date: 04/25/24

Checked:

server3\engprojects\Alachua County - Cuscowilla Fire Station\Plans\Current DWG\C23052J1.dwg, C200 - DIM, 4/25/2024 3:44:27 PM, TAR

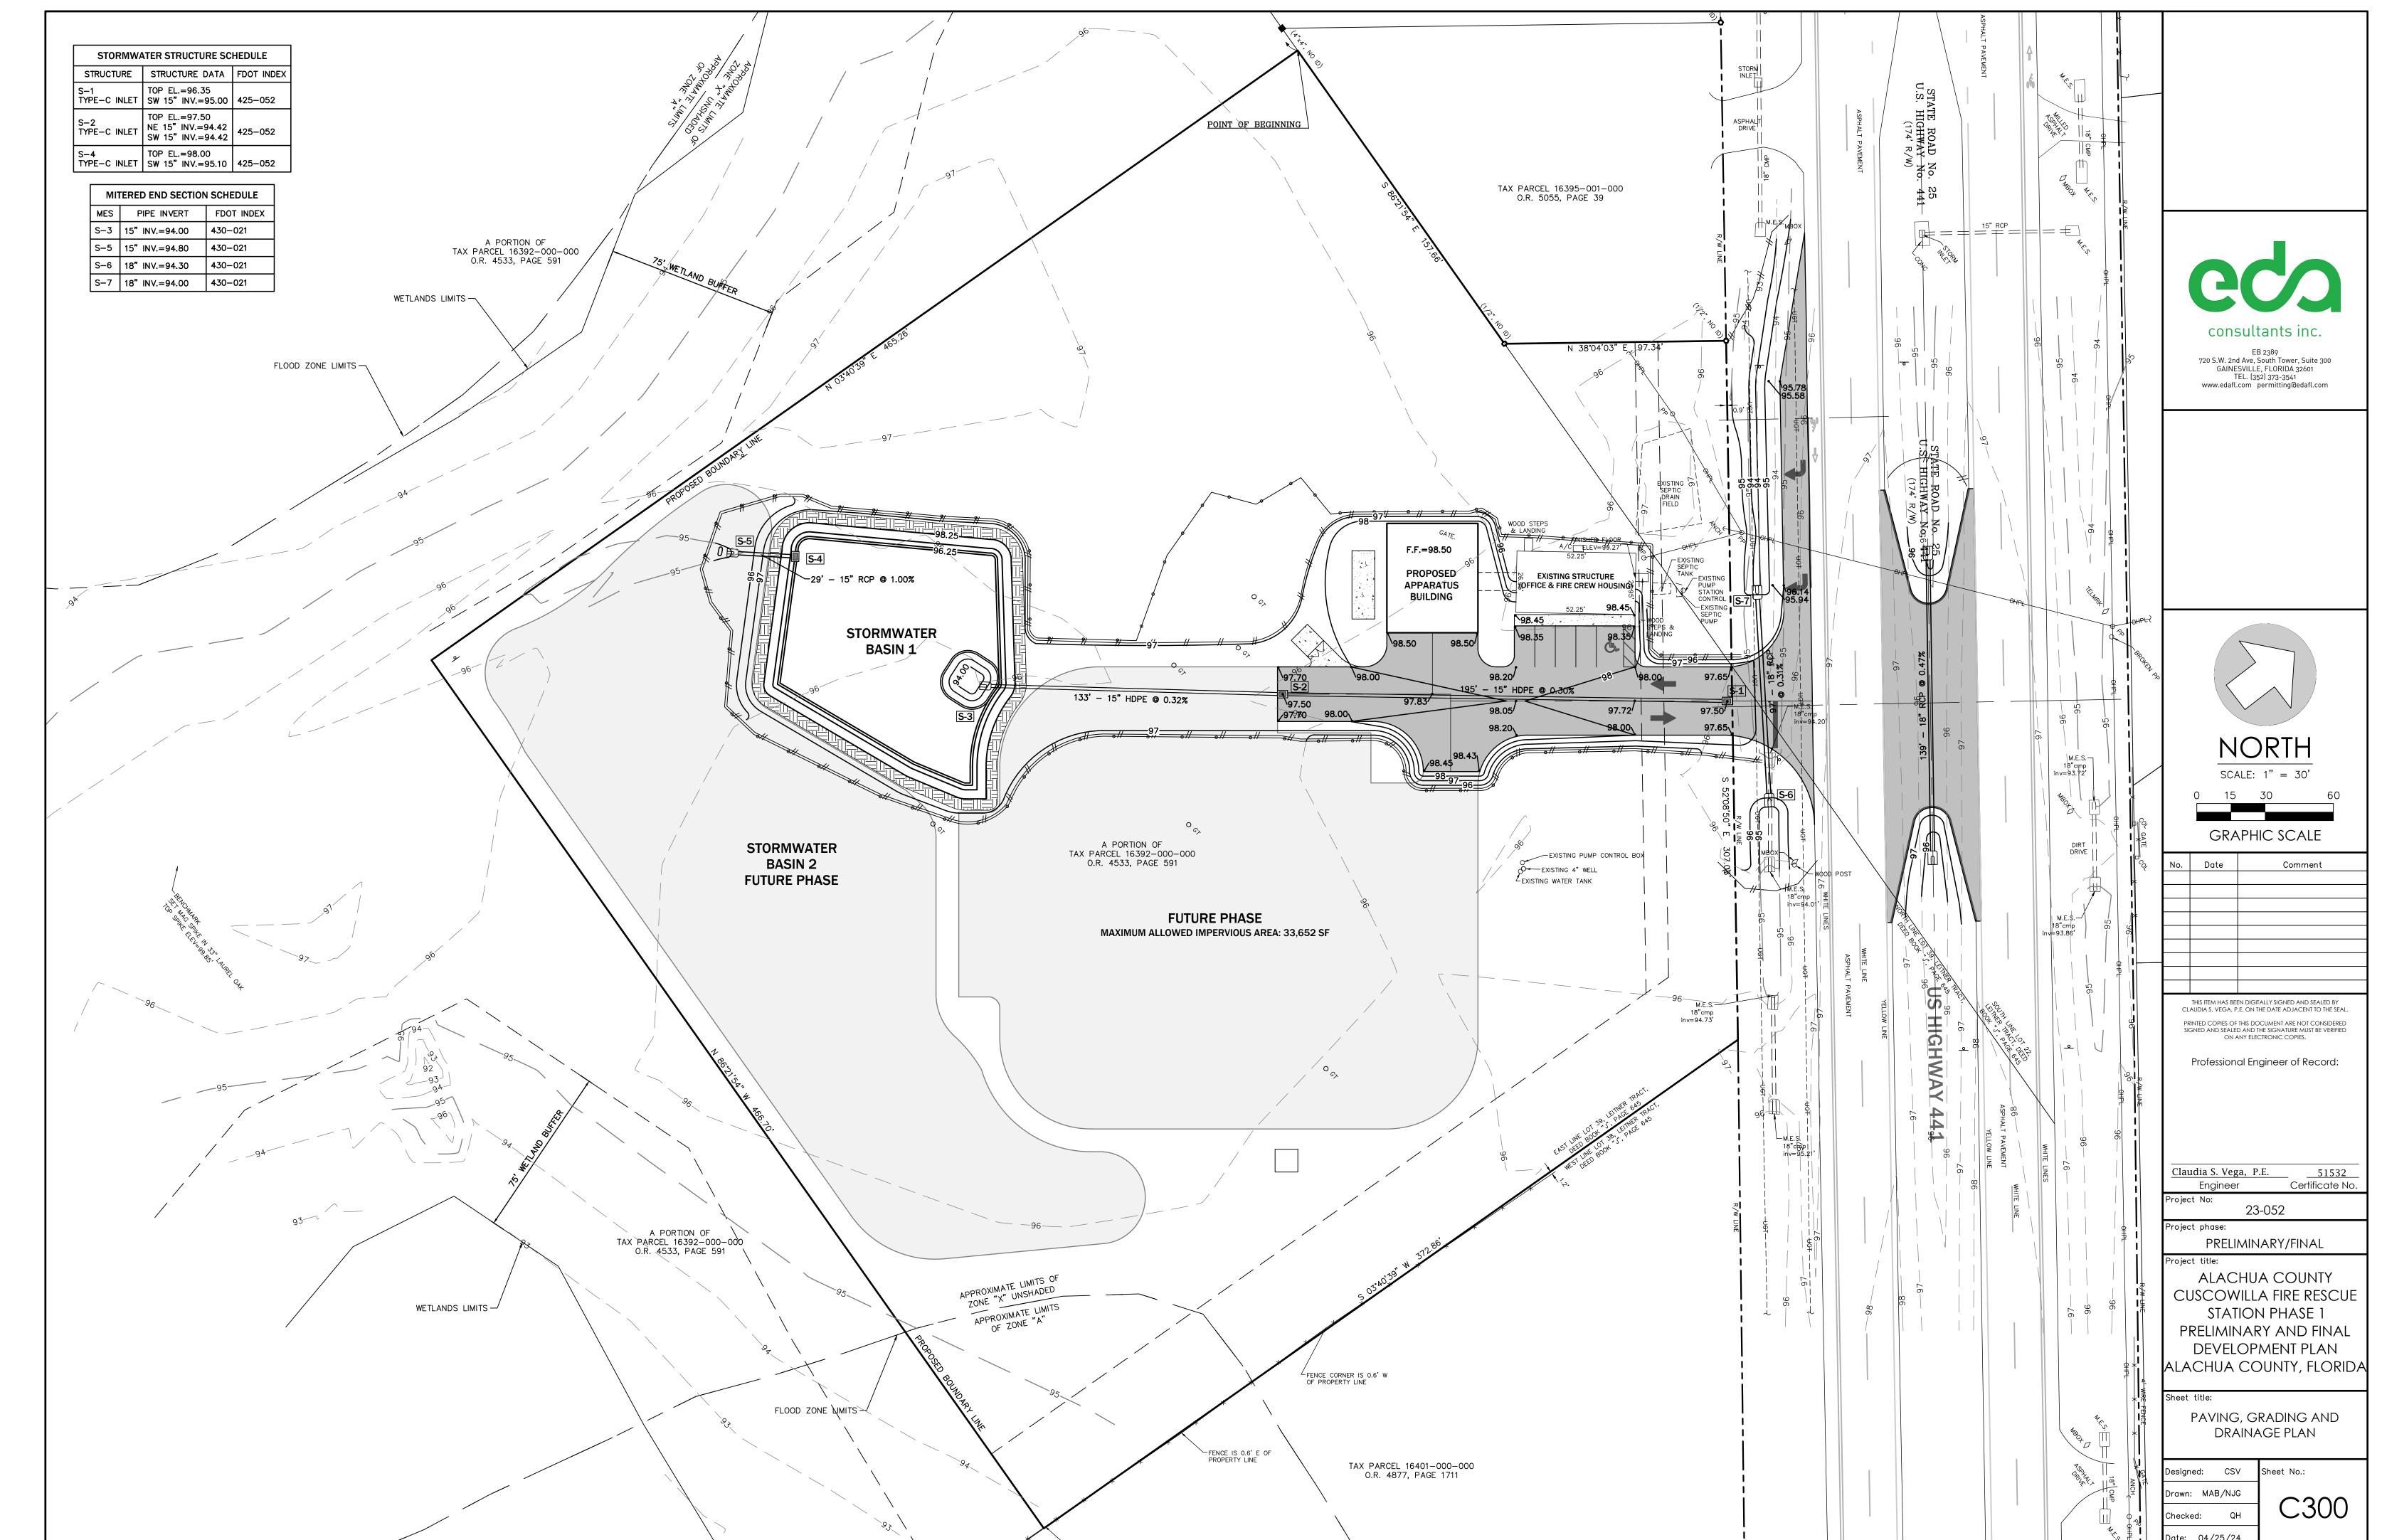

erver3\engprojects\Alachua County - Cuscowilla Fire Station\Plans\Current DWG\C23052J1.dwg, C300 - PGD, 4/25/2024 3:44:31 PM, TAR

# **ENGINEER'S CERTIFICATION**

1. ENGINEER'S CERTIFICATION:

I HEREBY CERTIFY THAT THE DESIGN OF THE STORMWATER MANAGEMENT SYSTEM FOR THE PROJECT KNOWN AS MEETS ALL THE REQUIREMENTS AND HAS BEEN
DESIGNED SUBSTANTIALLY IN ACCORDANCE WITH THE ALACHUA
COUNTY STORMWATER MANAGEMENT ORDINANCE.

CLAUDIA VEGA, P.E.

# MAINTENANCE NOTES

1. MAINTENANCE RESPONSIBILITY:

ALACHUA COUNTY WILL BE THE ENTITY RESPONSIBLE FOR THE MAINTENANCE OF THE EXISTING STORMWATER MANAGEMENT SYSTEM.

2. MAINTENANCE PLAN:


o GT

- A. BASINS SHALL BE MOWED REGULARLY TO AVOID EXCESSIVE VEGETATIVE GROWTH. MOWING SCHEDULE SHOULD BE MONTHLY DURING WINTER MONTHS AND MORE FREQUENTLY (BIWEEKLY) DURING SUMMER MONTHS.
- B. BASIN SHALL BE CLEANED OUT ANNUALLY OF ANY ACCUMULATED SEDIMENTATION BUILDUP. IF THE BASINS ARE SHOWING EXCESSIVE SEDIMENTATION ACCUMULATION AT THE BASIN BOTTOM, THE BASIN BOTTOM SHALL BE SCRAPED CLEAN MORE OFTEN AS THE CONDITION DIGITALES.
- C. BASIN SIDE SLOPES SHALL BE MAINTAINED WITH A GOOD STAND OF GRASS. SEASONAL GRASSES SHALL BE PLANTED TO AVOID EROSION (WINTER RYE, SUMMER MILLET).
- D. BASIN THAT DO NOT DRAWDOWN PROPERLY AND MAINTAIN STANDING WATER FOR AN EXTENDED PERIOD OF TIME MAY REQUIRE REMEDIAL ACTION. THE ENGINEER SHALL BE NOTIFIED TO HELP COORDINATE REMEDIAL ACTION IN THE EVENT THIS OCCURS.
- E. THE REQUIRED LANDSCAPING SHALL BE MAINTAINED IN A SOUND CONDITION AT ALL TIMES. ANY DEAD LANDSCAPING MATERIALS SHALL BE REPLACED IMMEDIATELY TO ASSURE PUBLIC SAFETY.



consultants inc.

EB 2389 720 S.W. 2nd Ave, South Tower, Suite 300 GAINESVILLE, FLORIDA 32601 TEL. (352) 373-3541 www.edafl.com permitting@edafl.com

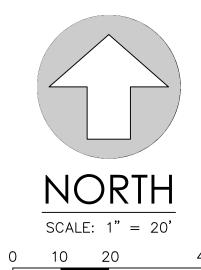

GRAPHIC SCALE

No.	Date	Comment

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY CLAUDIA S. VEGA, P.E. ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Professional Engineer of Record:

Claudia S. Vega, P.E. Certificate No.

23-052

Project phase:

PRELIMINARY/FINAL Project title:


ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL

DEVELOPMENT PLAN ALACHUA COUNTY, FLORIDA

Sheet title:

BASIN DETAIL

Designed: CSV Drawn: MAB/NJG Checked: Date: 04/25/24

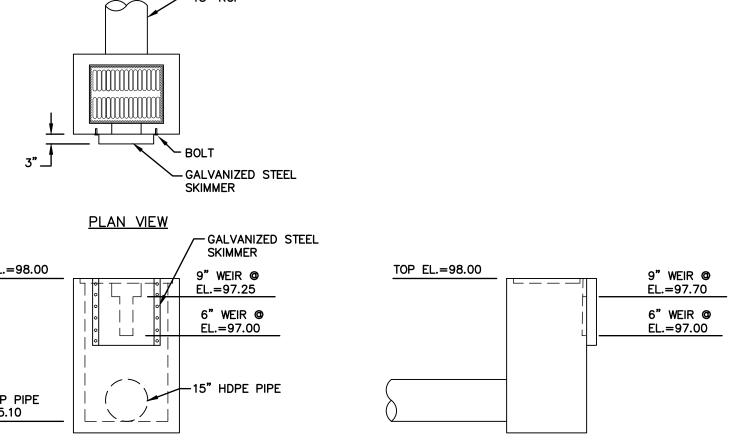

PROFILE VIEW

**BASIN OUTFALL S-4 DETAIL** 

THIS DOCUMENT WAS PREPARED IN ORDER TO BE IN COMPLIANCE WITH CHAPTER 62-621.300 (4) OF THE FLORIDA ADMINISTRATIVE CODE, WHICH PERTAINS TO THE GENERIC PERMIT FOR STORMWATER DISCHARGE FROM LARGE AND SMALL CONSTRUCTION ACTIVITIES. THE ADMINISTRATIVE CODE GRANTS THE FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION (FDEP) THE AUTHORITY TO REGULATE POINT SOURCE DISCHARGES OF STORM-WATER FROM CONSTRUCTION SITES. THIS DOCUMENT ESTABLISHES A STORMWATER POLLUTION PREVENTION PLAN FOR THE SITE AND IS ORGANIZED TO CORRESPOND TO PART V OF DEP DOCUMENT No. 62-621.300 (4) (A) FDEP FORM 62-261.300 (4) (B) IS TO BE SUBMITTED IN CONJUNCTION WITH THIS DOCUMENT.

### I. PROJECT INFORMATION:

PROJECT: ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE PRELIMINARY AND FINAL DEVELOPMENT PLAN

COUNTY: ALACHUA COUNTY FLORIDA
SECTION/TOWNSHIP/RANGE: S08, T11 SOUTH, R20 EAST
COUNTY PARCEL NO.:16392-000-000
LATITUDE AND LONGITUDE:29\*32'29.5"N 82\*18'58.6"W
STREET ADDRESS:

PROJECT AREA: 5.0 Ac.
APPROXIMATE AREA TO BE DISTURBED BY CONSTRUCTION:

## II. SITE DESCRIPTION:

1. THE PROPOSED DEVELOPMENT CONSISTS OF THE CONSTRUCTION OF A 1,920 SF APPARATUS BUILDING WITH ASSOCIATED PARKING AND STORMWATER

AT THE PREDEVELOPMENT CONDITIONS, THE PROJECT AREA IS DIVIDED INTO ONE DRAINAGE AREA AS SHOWN IN THE STORMWATER PLAN AS DESCRIBED BELOW:

1.) AREA 1: SHEET FLOWS SOUTH

AT POST-DEVELOPMENT CONDITIONS, THE PROPOSED PROJECT AREA WILL HAVE ONE DRAINAGE AREA AS SHOWN IN THE STORMWATER PLAN AND AS DESCRIBED BELOW:

1.) AREA 1: WILL BE CONVEYED TO BASIN 1 AND DISCHARGED SOUTH.

DRAINAGE AREA	BASIN NUMBER	PRE-DEVELOPMENT AREA	POST-DEVELOPMENT AREA	CURVE NUMBER	ENTIRE BASIN VOLUME	100 YR FLOOD PLAIN	BASIN TYPE
1	1	1.36 AC	1.36 AC	63.4	0.42 AC-FT	97.70	DRY

- 2. THE SOIL CONDITIONS WERE INVESTIGATED AND SUMMARIZED IN THE SOILS REPORT PREPARED BY GSE ENGINEERING & CONSULTING, INC. THE PROPOSED DRAINAGE PLAN WILL CONSIST OF ONE DRAINAGE AREA. AREA 1: 1.36 ACRES OF RUNOFF WILL BE CONVEYED TO BASIN 1 AND DISCHARGED SOUTH.
- 3. EXISTING AND FUTURE DRAINAGE PATTERNS ARE SHOWN ON THE DRAINAGE PLAN FOR PRE-DEVELOPMENT CONDITIONS AND POST-DEVELOPMENT CONDITIONS. OUTFALLS, AND STORMWATER BASINS ARE SHOWN IN THE DRAINAGE PLAN AND THE DETAIL PLAN.
- 4. SEQUENCE OF CONSTRUCTION:
- A. PRIOR TO CONSTRUCTION, SILT FENCING AND TREE PROTECTION BARRICADES SHALL BE INSTALLED AND ALL EXISTING DRAINAGE STRUCTURES SHALL BE PROTECTED IN ACCORDANCE WITH THE FDOT FLORIDA EROSION AND SEDIMENTATION CONTROL MANUAL.
- B. THE CONSTRUCTION ENTRANCE(S) WILL BE STABILIZED TO MINIMIZE THE CREATION OF DUST AND OFF SITE TRACKING OF SEDIMENTS.
- C. THE SITE SHALL BE CLEARED AND GRUBBED OF UNDESIRABLE VEGETATION.
- D. THE UNDERGROUND UTILITIES AND STORMWATER PIPING WILL BE INSTALLED AND CONNECTED TO EXISTING STRUCTURES.
- E. THE SITE WILL BE ROUGHLY GRADED. IF SUITABLE, THE EXCAVATED MATERIAL MAY BE USED AS FILL FOR ON—SITE GRADING. THE ROADWAYS SHALL BE GRADED. (THE BASIN AREA SHALL BE STABILIZED AS SPECIFIED
- F. ROADWAYS AND PARKING LOTS WILL BE COMPACTED AND A LIMEROCK BASE WILL BE ESTABLISHED FOLLOWED BY AN OVERLAY OF ASPHALTIC CONCRETE. BUILDINGS SHALL BE CONSTRUCTED.
- G. UPON SIGNIFICANT COMPLETION OF CONSTRUCTION, THE STORMWATER SYSTEM SHALL BE FLUSHED OUT TO REMOVE ACCUMULATED DEBRIS AND SEDIMENT.
- H. ALL DISTURBED AREAS WITHIN THE CONSTRUCTION AREA SHALL BE COMPLETELY GRASSED AND/OR LANDSCAPED. EVIDENCE OF GROWTH MUST BE PRESENT PRIOR TO REMOVAL OF SILT FENCING AND OTHER EROSION CONTROL APPLICATIONS.

# III. CONTROLS:

THE CONTROLS SHALL BE IMPLEMENTED AND MAINTAINED DURING THE ENTIRE CONSTRUCTION OF THE PROJECT. IF SITE CONDITIONS ARE SUCH THAT ADDITIONAL CONTROL MEASURES ARE REQUIRED THAN WHAT IS SPECIFIED IN THE EROSION AND SEDIMENTATION CONTROL PLAN, THEN THE CONTRACTOR SHALL IMPLEMENT ADDITIONAL BEST MANAGEMENT PRACTICES NECESSARY.

- 1. THE CONSTRUCTION ACCESS SHALL BE STABILIZED WITH GRAVEL AND TEMPORARY VEGETATION TO PREVENT SILT LEAVING THE SITE.
- 2. TREE BARRICADES SHALL BE IMPLEMENTED BEFORE CLEARING AND GRUBBING OF ANY OF THE WORK AREAS.
- 3. BEFORE CLEARING, SILT FENCES SHALL BE INSTALLED AROUND THE PERIMETER OF THE CONSTRUCTION AND AROUND THE WETLAND(S) AND/OR BASIN(S) AS SHOWN IN THE PLANS. ALL EXISTING STORM DRAINAGE SWALES AND INLETS SHALL BE PROTECTED PER THE FDOT FLORIDA EROSION AND SEDIMENTATION CONTROL MANUAL.
- 4. AFTER CLEARING BUT BEFORE EXCAVATION AND GRADING, TEMPORARY BERMS AND SWALES SHALL BE CONSTRUCTED AS REQUIRED TO DIVERT THE FLOW INTO THE CORRESPONDING STORMWATER BASIN.
- 5. DURING CONSTRUCTION OF PAVING AND BUILDINGS, EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE INSTALLED AS REQUIRED.
- 6. ALL DISTURBED AREAS WITHIN THE CONSTRUCTION SITE SHALL BE COMPLETELY LANDSCAPED AND/OR GRASSED. FINAL STABILIZATION (INCLUDING SEEDING, MULCHING, SODDING OR RIPRAP) SHALL BE INSTALLED AS REQUIRED. GRASS SEEDING RATES AND MIXTURES SHALL BE PER FDOT INDEX 104. EVIDENCE OF GROWTH MUST BE PRESENT PRIOR TO REMOVAL OF SILT FENCING AND OTHER EROSION CONTROL APPLICATIONS AND PRIOR TO FINAL RELEASE.

### IV. EROSION AND SEDIMENTATION CONTROLS:

### STABILIZATION PRACTICES

- 1. ALL ENTRANCES TO THE SITE SHALL BE STABILIZED BEFORE CONSTRUCTION AND FURTHER DISTURBANCE BEGINS. GRAVEL PAD SHALL PROVIDE STABILIZATION AND MINIMIZE THE AMOUNT OF SEDIMENT LEAVING THE SITE. MAINTENANCE OF THE ENTRANCE SHALL INCLUDE SWEEPING OF THE AREA ADJACENT TO THE ENTRANCE. STONE AND GRAVEL MIGHT NEED TO BE PERIODICALLY ADDED TO MAINTAIN THE EFFECTIVENESS OF THE ENTRANCE(S).
- TREE BARRICADES SHALL BE INSTALLED AROUND THE TREES AS SHOWN IN THE DETAIL PLAN TO PROTECT THE EXISTING VEGETATION.
- 3. MULCH SHALL BE PLACED IN THE AREAS REQUIRED TO PREVENT EROSION FROM STORMWATER RUNOFF AND THE AREAS SHOWN ON THE PLANS. MULCH SHALL BE ANCHORED TO RESIST WIND DISPLACEMENT AND SHALL BE INSPECTED AFTER EVERY RAINSTORM TO IDENTIFY AREAS WHERE MULCH HAS BEEN WASHED OUT OR LOOSENED. THESE AREAS SHALL HAVE MULCH COVER REPLACEMENT.
- 4. SEEDING SHALL BE STARTED AFTER GRADING HAS BEEN FINISHED ON THE AREAS SHOWN IN THE PLANS. SEEDED AREAS SHOULD BE INSPECTED FOR FAILURE TO ESTABLISH, AND NECESSARY REPAIRS AND RESEEDING SHOULD BE MADE AS SOON AS POSSIBLE. ADDITIONAL SEEDING AND MULCH MAY BE REQUIRED AS NECESSARY TO PREVENT EROSION DURING OR AFTER CONSTRUCTION HAS FINISHED.
- 5. SOD SHALL BE INSTALLED IN THE AREAS SHOWN IN THE PLANS. SOD SHALL BE PEGGED IF INSTALLED ON SLOPES GREATER THAN 3:1. SODDED AREAS SHALL BE MAINTAINED AND INSPECTED TO ENSURE SUCCESSFUL ESTABLISHMENT.

### SEDIMENTATION PRACTICES

- 1. SILT FENCES SHALL BE INSTALLED IN THE AREAS SHOWN IN THE PLANS AND AS REQUIRED TO PREVENT SEDIMENT FROM LEAVING THE CONSTRUCTION AREA. SILT FENCES SHALL BE INSPECTED AFTER EACH RAINFALL EVENT TO ENSURE THAT THERE ARE NO GAPS OR TEARS. IF GAPS OR TEARS ARE FOUND THE FABRIC SHOULD BE REPAIRED OR REPLACED. SEDIMENT REMOVAL SHALL BE PART OF THE REGULAR MAINTENANCE. SILT FENCES SHALL REMAIN IN PLACE UNTIL CONSTRUCTION HAS FINISHED AND DISTURBED AREAS ARE PERMANENTLY STARILIZED.
- DIVERSION SWALES, IF REQUIRED, SHALL BE CONSTRUCTED BEFORE MAJOR LAND DISTURBANCE OF THE RECEIVING BASIN. DIVERSION SWALES SHALL BE STABILIZED AFTER CONSTRUCTION TO MAINTAIN ITS EFFICIENCY.
- 3. INLETS SHOULD BE TEMPORARILY PROTECTED TO PREVENT SEDIMENT ENTERING THE INLET. BARRIERS WILL CATCH SOIL, DEBRIS AND SEDIMENT AT THE ENTRANCE OF THE INLET.
- 4. OUTFALL STRUCTURES SHALL HAVE SILT FENCES TO PREVENT SILT FROM ENTERING THE STORMWATER BASINS AND SHALL BE STABILIZED AS REQUIRED TO PREVENT EROSION FROM WASHOUTS.

# V. STORMWATER MANAGEMENT:

- 1. THE PROPOSED PROJECT OBTAINED AN ENVIRONMENTAL RESOURCE PERMIT FROM ST. JOHNS RIVER WATER MANAGEMENT DISTRICT (SJRWMD) FOR THE CONSTRUCTION AND OPERATION OF A STORMWATER TREATMENT SYSTEM AND CONTROLS. THE PROPOSED SYSTEM (AS SHOWN ON THE PLANS) INCLUDED THE USE OF THE BEST MANAGEMENT PRACTICES (BMP) CONSISTENT WITH THE APPLICABLE REQUIREMENTS OF RULE 40C-42 OF THE DISTRICT. THE OWNER AND/OR THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE OPERATION AND MAINTENANCE OF THE STORMWATER TREATMENT SYSTEM AND CONTROLS UNTIL CONSTRUCTION ACTIVITIES ARE COMPLETED AND FINAL STABILIZATION HAS BEEN ACCOMPLISHED. HOWEVER, THE OWNER AND/OR AN ENTITY SIMILAR TO A HOMEOWNERS ASSOCIATION SHALL BE RESPONSIBLE FOR THE OPERATION AND MAINTENANCE OF THE STORMWATER SYSTEM IN PERPETUITY, IN ACCORDANCE WITH THE REQUIREMENTS OF THE ENVIRONMENTAL RESOURCE PERMIT.
- 2. TO TREAT AND CONTROL THE STORMWATER PRODUCED BY THE PROPOSED DEVELOPMENT, THE PROJECT REQUIRES THE INSTALLATION AND CONSRUCTION OF THE FOLLOWING BMP'S: ONE DRY RETENTION BASIN WITH ALL GRADING ASSOCIATED WITH THE CONSTRUCTION. THE BASIN HAS BEEN DESIGNED TO CONTAIN AND ATTENUATE THE STORMS AND DISCHARGE AT PRE—DEVELOPMENT CONDITIONS, WHILE PROVIDING TREATMENT TO THE RUNOFF AS REQUIRED BY THE DISTRIC AND STATE RULES USING THE GUIDELINES CONTAINED IN THE
- 3. AREA 1 WILL HAVE A DRY RETENTION BASIN THAT DISCHARGES SOUTH

# VI. CONTROLS FOR OTHER POTENTIAL POLLUTANTS:

- WASTE DISPOSAL: NO SOLID MATERIALS, INCLUDING CONSTRUCTION MATERIALS, SHALL BE DISCHARGED TO SURFACE WATERS AND ARE NOT AUTHORIZED UNDER THE ISSUED ENVIRONMENTAL RESOURCE PERMIT.
- 2. THE USE OF GRAVEL AND CONTINUING SWEEPING ACTIVITIES AT THE ENTRANCE OF THE SITE WILL CONTROL THE TRACKING OF SEDIMENT AND DUST LEAVING THE SITE
- 3. THE PROPOSED DEVELOPMENT WILL PROVIDE WATER AND SEWER SYSTEM BY CONNECTING INTO THE CENTRAL MUNICIPAL SYSTEM OF GAINESVILLE REGIONAL UTILITIES.
- 4. ANY APPLICATION OF FERTILIZERS AND PESTICIDES NECESSARY TO ESTABLISH AND MAINTENANCE OF VEGETATION DURING CONSTRUCTION AND THROUGH PERPETUITY MAINTENANCE SHALL FOLLOW THE MANUFACTURERS RECOMMENDATIONS AND THE APPLICABLE RULES OF THE STATE OF FLORIDA.
- 5. ANY TOXIC MATERIALS REQUIRED DURING CONSTRUCTION SHALL BE PROPERLY STORED, DISPOSED OF AND CONTRACTOR AND/OR OWNER SHALL PROVIDE THE APPROPRIATE PERMITS FROM THE LOCAL OR STATE AGENCIES.

# VII. APPROVED STATE OR LOCAL PLANS:

- 1. ALL THE SEDIMENT AND EROSION CONTROLS THAT ARE LISTED IN THE SITE PLAN AS APPROVED BY THE SJRWMD ARE INCLUDED IN THIS STORMWATER POLLUTION PREVENTION PLAN (SEE ITEM III AND IV).
- 2. THIS STORMWATER POLLUTION PREVENTION PLAN SHALL BE AMENDED IF REQUIRED BY ANY LOCAL OR STATE AGENCY OR AS REQUIRED BY UNFORESEEABLE CONDITIONS AND THE OWNER SHALL SUBMIT A RE-CERTIFICATION TO THE NPDES STATE OFFICE THAT THE PLAN HAS BEEN AMENDED TO ADDRESS THOSE CHANGES.

### VIII. MAINTENANCE:

THE CONTRACTOR IS RESPONSIBLE FOR THE MAINTENANCE, INSPECTION SCHEDULE, AND REPAIRS OUTLINED IN THIS PLAN. MAINTENANCE SHALL CONTINUE THROUGHOUT THE PROJECT UNTIL WORK IS COMPLETE. THE CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES AFTER CONSTRUCTION IS COMPLETE.

IN ADDITION TO THE ITEMS MENTIONED IN THE PREVIOUS SECTIONS, THE CONTRACTOR SHALL INITIATE ANY REPAIRS WITHIN 24 HOURS OF BEING REPORTED. IN THE EVENT THAT THE BASINS DO NOT PERFORM PROPERLY OR IF A SINKHOLE DEVELOPS, THE PROJECT ENGINEER SHALL BE NOTIFIED TO ASSIST IN COORDINATING REMEDIAL ACTION.

1. MAINTENANCE WOULD BE DIVIDED IN ROUTINE MAINTENANCE AND REPAIR MAINTENANCE. ALL STORMWATER BMP'S SHOULD BE INSPECTED FOR CONTINUED EFFECTIVENESS AND STRUCTURAL INTEGRITY ON A REGULAR BASIS. THE SYSTEMS SHOULD BE CHECKED AFTER EACH STORM EVENT IN ADDITION TO REGULARLY SCHEDULED INSPECTIONS.

2. ROUTINE MAINTENANCE REQUIREMENTS SHOULD BE INCLUDED IN THE

BMP'S MAINTENANCE IS ADEQUATE OR NEEDS A REVISION. INSPECTORS SHALL KEEP RECORD OF MAINTENANCE, ROUTINE OR REPAIR, TO PROVIDE EVIDENCE OF AN EFFICIENT INSPECTION AND MAINTENANCE.

3. SIDE ENTRANCES: MAINTENANCE SHALL INCLUDE REPLACEMENT OF GRAVEL

INSPECTOR CHECKLIST TO AID THE INSPECTOR IN DETERMINING WHETHER A

- AND CLEANING THE SOIL THAT IS TRACKED OFFSITE FOR PROPER DISPOSAL.
- 4. TREE BARRICADES: MAINTENANCE SHALL INCLUDE INSPECTION OF MESH AND POSTS AND REPAIR OR REPLACEMENT OF DAMAGED VEGETATION.

6. DIVERSION SWALES: MAINTENANCE SHALL INCLUDE INSPECTION AFTER

- 5. SILT FENCES: MAINTENANCE SHALL INCLUDE SEDIMENT REMOVAL AND INSPECTION TO ENSURE PROPER ANCHORING AND THAT NO TEARING OR GAPS HAVE OCCURRED. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT HAS REACHED ONE—THIRD THE HEIGHT OF SILT FENCE.
- EVERY RAINFALL EVENT AND ONCE EVERY TWO WEEKS BEFORE FINAL STABILIZATION. THEY SHOULD BE CLEARED OF SEDIMENT AND MAINTAIN VEGETATIVE COVER.

  7. TEMPORARY BERMS: MAINTENANCE SHALL INCLUDE REMOVAL OF DEBRIS.
- 7. TEMPORARY BERMS: MAINTENANCE SHALL INCLUDE REMOVAL OF DEBRIS, TRASH SEDIMENT AND LEAVES. SIDES OF THE BERM SHALL BE INSPECTED FOR EROSION AFTER EACH STORM EVENT.
- 8. MULCHING: ROUTINE MAINTENANCE SHALL INCLUDE REPLACEMENT
- 9. SEEDING: ROUTINE MAINTENANCE SHALL INCLUDE RESEEDING OF AREAS THAT FAILED TO ESTABLISH.
- 10. SODDING: ROUTINE MAINTENANCE SHALL INCLUDE WATERING AND MOWING. REPLACEMENT OF GRASS MAY BE NECESSARY IF COVER IS NOT FULLY ESTABLISHED.
- 11. INLETS: ROUTINE MAINTENANCE SHALL INCLUDE INSPECTION AFTER EVERY STORM EVENT AND MIGHT INCLUDE REMOVAL OF ACCUMULATED SEDIMENT.
- 12. OUTFALL STRUCTURES: ROUTINE MAINTENANCE SHALL INCLUDE INSPECTION AFTER EVERY STORM EVENT TO ASSURE NO EROSION OR SCOUR HAS OCCURRED.

### IX. INSPECTIONS:

- 1. THE OWNER AND /OR CONTRACTOR SHALL PROVIDE QUALIFIED PERSONNEL TO INSPECT ALL POINTS OF POTENTIAL DISCHARGE FROM THE PROJECT SITE FOR DISTURBED AREAS, THE EROSION AND SEDIMENTATION CONTROLS AND BMP'S AS LISTED IN THIS PLAN. THE INSPECTION SHALL BE PERFORMED DURING CONSTRUCTION AND BEFORE FINAL STABILIZATION, ONCE EVERY SEVEN—CALENDAR DAYS AND WITHIN 24 HOURS OF THE END OF A STORM THAT IS GREATER THAN 0.50 INCHES. AFTER FINAL STABILIZATION AND BEFORE FINISH OF CONSTRUCTION THE INSPECTION SHALL BE CONDUCTED ONCE EVERY MONTH.
- 2. THE CONTRACTOR SHALL INSTALL A RAIN GAUGE AT THE SITE TO MONITOR AND DOCUMENT RAINFALL EVENTS IN EXCESS OF 0.50 INCHES.
- 3. ALL DISTURBED AREAS AND AREAS USED FOR MATERIALS STORAGE SHALL BE INSPECTED FOR POLLUTANTS ENTERING THE STORMWATER SYSTEM. THE STORMWATER MANAGEMENT SYSTEM AND EROSION AND SEDIMENT CONTROL MEASURES IDENTIFIED IN THE PLAN SHALL BE INSPECTED TO ENSURE THEY ARE OPERATING CORRECTLY. LOCATIONS WHERE VEHICLES ENTER AND LEAVE THE SITE SHALL BE INSPECTED FOR EVIDENCE OF OFFSITE SEDIMENT TRACKING.
- 4. REPAIR OR MAINTENANCE NEEDED TO ASSURE PROPER OPERATION OF THE STORMWATER POLLUTION PREVENTION PLAN SHALL BE DONE IN A TIMELY MANNER BUT NO LATER THAN 7 CALENDAR DAYS FOLLOWING THE INSPECTION.
- 5. A REPORT SHALL BE KEPT OF EACH INSPECTION FOR THREE YEARS AFTER FINAL STABILIZATION AND SHALL INCLUDE THE DATES OF EACH INSPECTION, THE SCOPE OF THE INSPECTION, MAJOR OBSERVATIONS, ANY REPAIR AND/OR MAINTENANCE REQUIRED AND ANY INCIDENT OF NON—COMPLIANCE. IF THE REPORT DOES NOT CONTAIN ANY INCIDENTS OF NON—COMPLIANCE, THE REPORT SHALL CONTAIN A CERTIFICATION THAT THE FACILITY HAS BEEN IN COMPLIANCE WITH THE STORMWATER POLLUTION PREVENTION PLAN AND THE NPDES PERMIT. THE REPORT SHALL INCLUDE THE NAME AND QUALIFICATIONS OF THE INSPECTOR AND SHALL BE SIGNED IN ACCORDANCE TO FDEP RULE 62—621.300, PART VII.C. A COPY OF THE CONSTRUCTION INSPECTION FORM IS INCLUDED ON THIS STORMWATER POLLUTION PREVENTION PLAN SHEET. A COPY SHALL BE RETAINED AT THE CONSTRUCTION SITE FROM THE DATE OF PROJECT INITIATION TO THE DATE OF FINAL STABILIZATION.

## X. NON-STORMWATER DISCHARGES:

- 1. THE FOLLOWING NON-STORMWATER DISCHARGES MIGHT BE COMBINED WITH STORMWATER AND WOULD BE AUTHORIZED AS PART OF THIS PERMIT: FIRE HYDRANT FLUSHING, CONTROL OF DUST, POTABLE WATER FLUSHING AND IRRIGATION DRAINAGE. BECAUSE OF THE NATURE OF THESE DISCHARGES, THE EROSION, STABILIZATION AND TREATMENT SYSTEMS TO BE IMPLEMENTED, AS PART OF THIS PLAN WOULD BE APPROPRIATE TO PREVENT AND TREAT ANY POLLUTION RELATED TO THESE NON-STORMWATER DISCHARGES.
- 2. DISCHARGES FROM DEWATERING ACTIVITIES ASSOCIATED WITH SITE CONSTRUCTION ARE NOT AUTHORIZED AND REQUIRED CONSTRUCTION OF TEMPORARY SEDIMENTATION BASINS AND USE OF APPROPRIATE FLOCCULATING AGENTS TO ENHANCE PARTICLE SEGREGATION AND SPEED UP SETTLING OF PARTICLES.

## XI. CONTRACTORS:

1. ALL CONTRACTORS AND/OR SUBCONTRACTORS RESPONSIBLE FOR IMPLEMENTING THE PLAN SHALL SIGN THE CERTIFICATION STATEMENT BEFORE STARTING CONSTRUCTION ACTIVITIES OF THE PROJECT. THE CERTIFICATION MUST INCLUDE THE NAME AND TITLE OF THE PERSON PROVIDING THE SIGNATURE, THE NAME, ADDRESS AND TELEPHONE NUMBER OF THE CONTRACTING FIRM, THE ADDRESS OF THE SITE AND THE DATE THE CERTIFICATION IS MADE. THE OWNER SHALL KEEP THESE CERTIFICATIONS AS PART OF THIS POLLUTION PLAN. MULTIPLE COPIES OF THE CERTIFICATION STATEMENT MAY BE NECESSARY DEPENDING UPON THE NUMBER OF SUBCONTRACTORS ASSOCIATED WITH THE PROJECT.

### **CERTIFICATION STATEMENT**

CITY, STATE, ZIP CODE:

"I CERTIFY UNDER PENALTY OF LAW THAT I UNDERSTAND AND SHALL COMPLY WITH THE TERMS AND CONDITIONS OF THE STATE OF FLORIDA GENERIC PERMIT FOR STORMWATER DISCHARGE FROM LARGE AND SMALL CONSTRUCTION ACTIVITIES AND THIS STORMWATER POLLUTION PREVENTION PLAN PREPARED THEREUNDER."

CONTRACTING FIRM:						
ADDRESS:						
CITY, STATE, ZIP CODE:						
TELEPHONE:						
FAX:						
PROJECT NAME: ALACHUA COUNTY CUSCOWILLA FIRE RESCUE STATION PHASE 1 PRELIMINARY AND FINAL DEVELOPMENT PLAN						
PROJECT ADDRESS:						

EB 2389
720 S.W. 2nd Ave, South Tower, Suite 300
GAINESVILLE, FLORIDA 32601
TEL. (352) 373-3541
www.edafl.com permitting@edafl.com

consultants inc.

EB 2389
720 S.W. 2nd Ave, South Tower, Suite 300
GAINESVILLE, FLORIDA 32601
TEL. (352) 373-3541

PROJECT N		HUA COUNTY CUSCO MINARY AND FINAL					PDES STOR	MWATER IDENTIFICATION NO.: 1	FLR10
OWNER: _						CONTRA	ACTOR:		
CONSTRUC	CTION MANAC	GER:							
Date of Inspection	Location	Rain data	Type of control (see below)	Date install / modified		Current Condition (see below)	Obser	vations or Corrective Action / Other Remarks	Inspecte By
					_				
					-				
CONDITIO	N CODE:	G = Good C = Needs to	o be cleaned			eeds maintenance o immediate mainter			
				·				-	
CONTROL 1	YPE CODES								
1. Silt Fenc	e	10. Storm drain		19.	19. Reinforced soil retaining system 28. Tree protection				
2. Earth dik		11. Vegetative b			20. Gabion		29. Detention pond		
3. Structural diversion 12. Vegetative pres			reservation area 21. Se			21. Sediment Basin		30. Retention pond	
4. Swale 13. Retention Po					porary seed / sod		31. Waste disposal / housekeeping		
±			n entrance stabilization 23		23. Permanent seed / sod		32. Dam		
		15. Perimeter di			24. Mulch			33. Sand Bag	
		16. Curb and gu			25. Hay Bales		34. Other		
8. Pipe slope drain		17. Paved road s			26. Geotextile				
9. Level spreaders 18. Rock outlet protection		orotection	27.	27. Rip-rap					

The above signature also shall certify that this facility is in compliance with the Stormwater Pollution Prevention Plan and the State of Florida

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a

the possibility of fine and imprisonment for knowing violations.

Generic Permit for Stormwater Discharge from Large and Small Construction Activities if there are not any incidents of non compliance identified

\* \* \* \* \* \*

system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system or those persons directly responsible for gathering the information, the information submitted is, to the best of

my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including

No. Date Comment

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY
CLAUDIA S. VECA DE ON THE DATE ADJACENT TO THE SEAL

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Professional Engineer of Record:

Claudia S. Vega, P.E. 51532
Engineer Certificate No.

23-052
Project phase:
PRELIMINARY/FINAL

Project title:

ALACHUA COUNTY

CUSCOWILLA FIRE RESCUE

STATION PHASE 1

PRELIMINARY AND FINAL

DEVELOPMENT PLAN

ALACHUA COUNTY, FLORIDA

Sheet title:
STORMWATER POLLUTION

PREVENTION PLAN


Designed: CSV She

Drawn: MAB/NJG

Checked: QH

Date: 04/25/24

C320

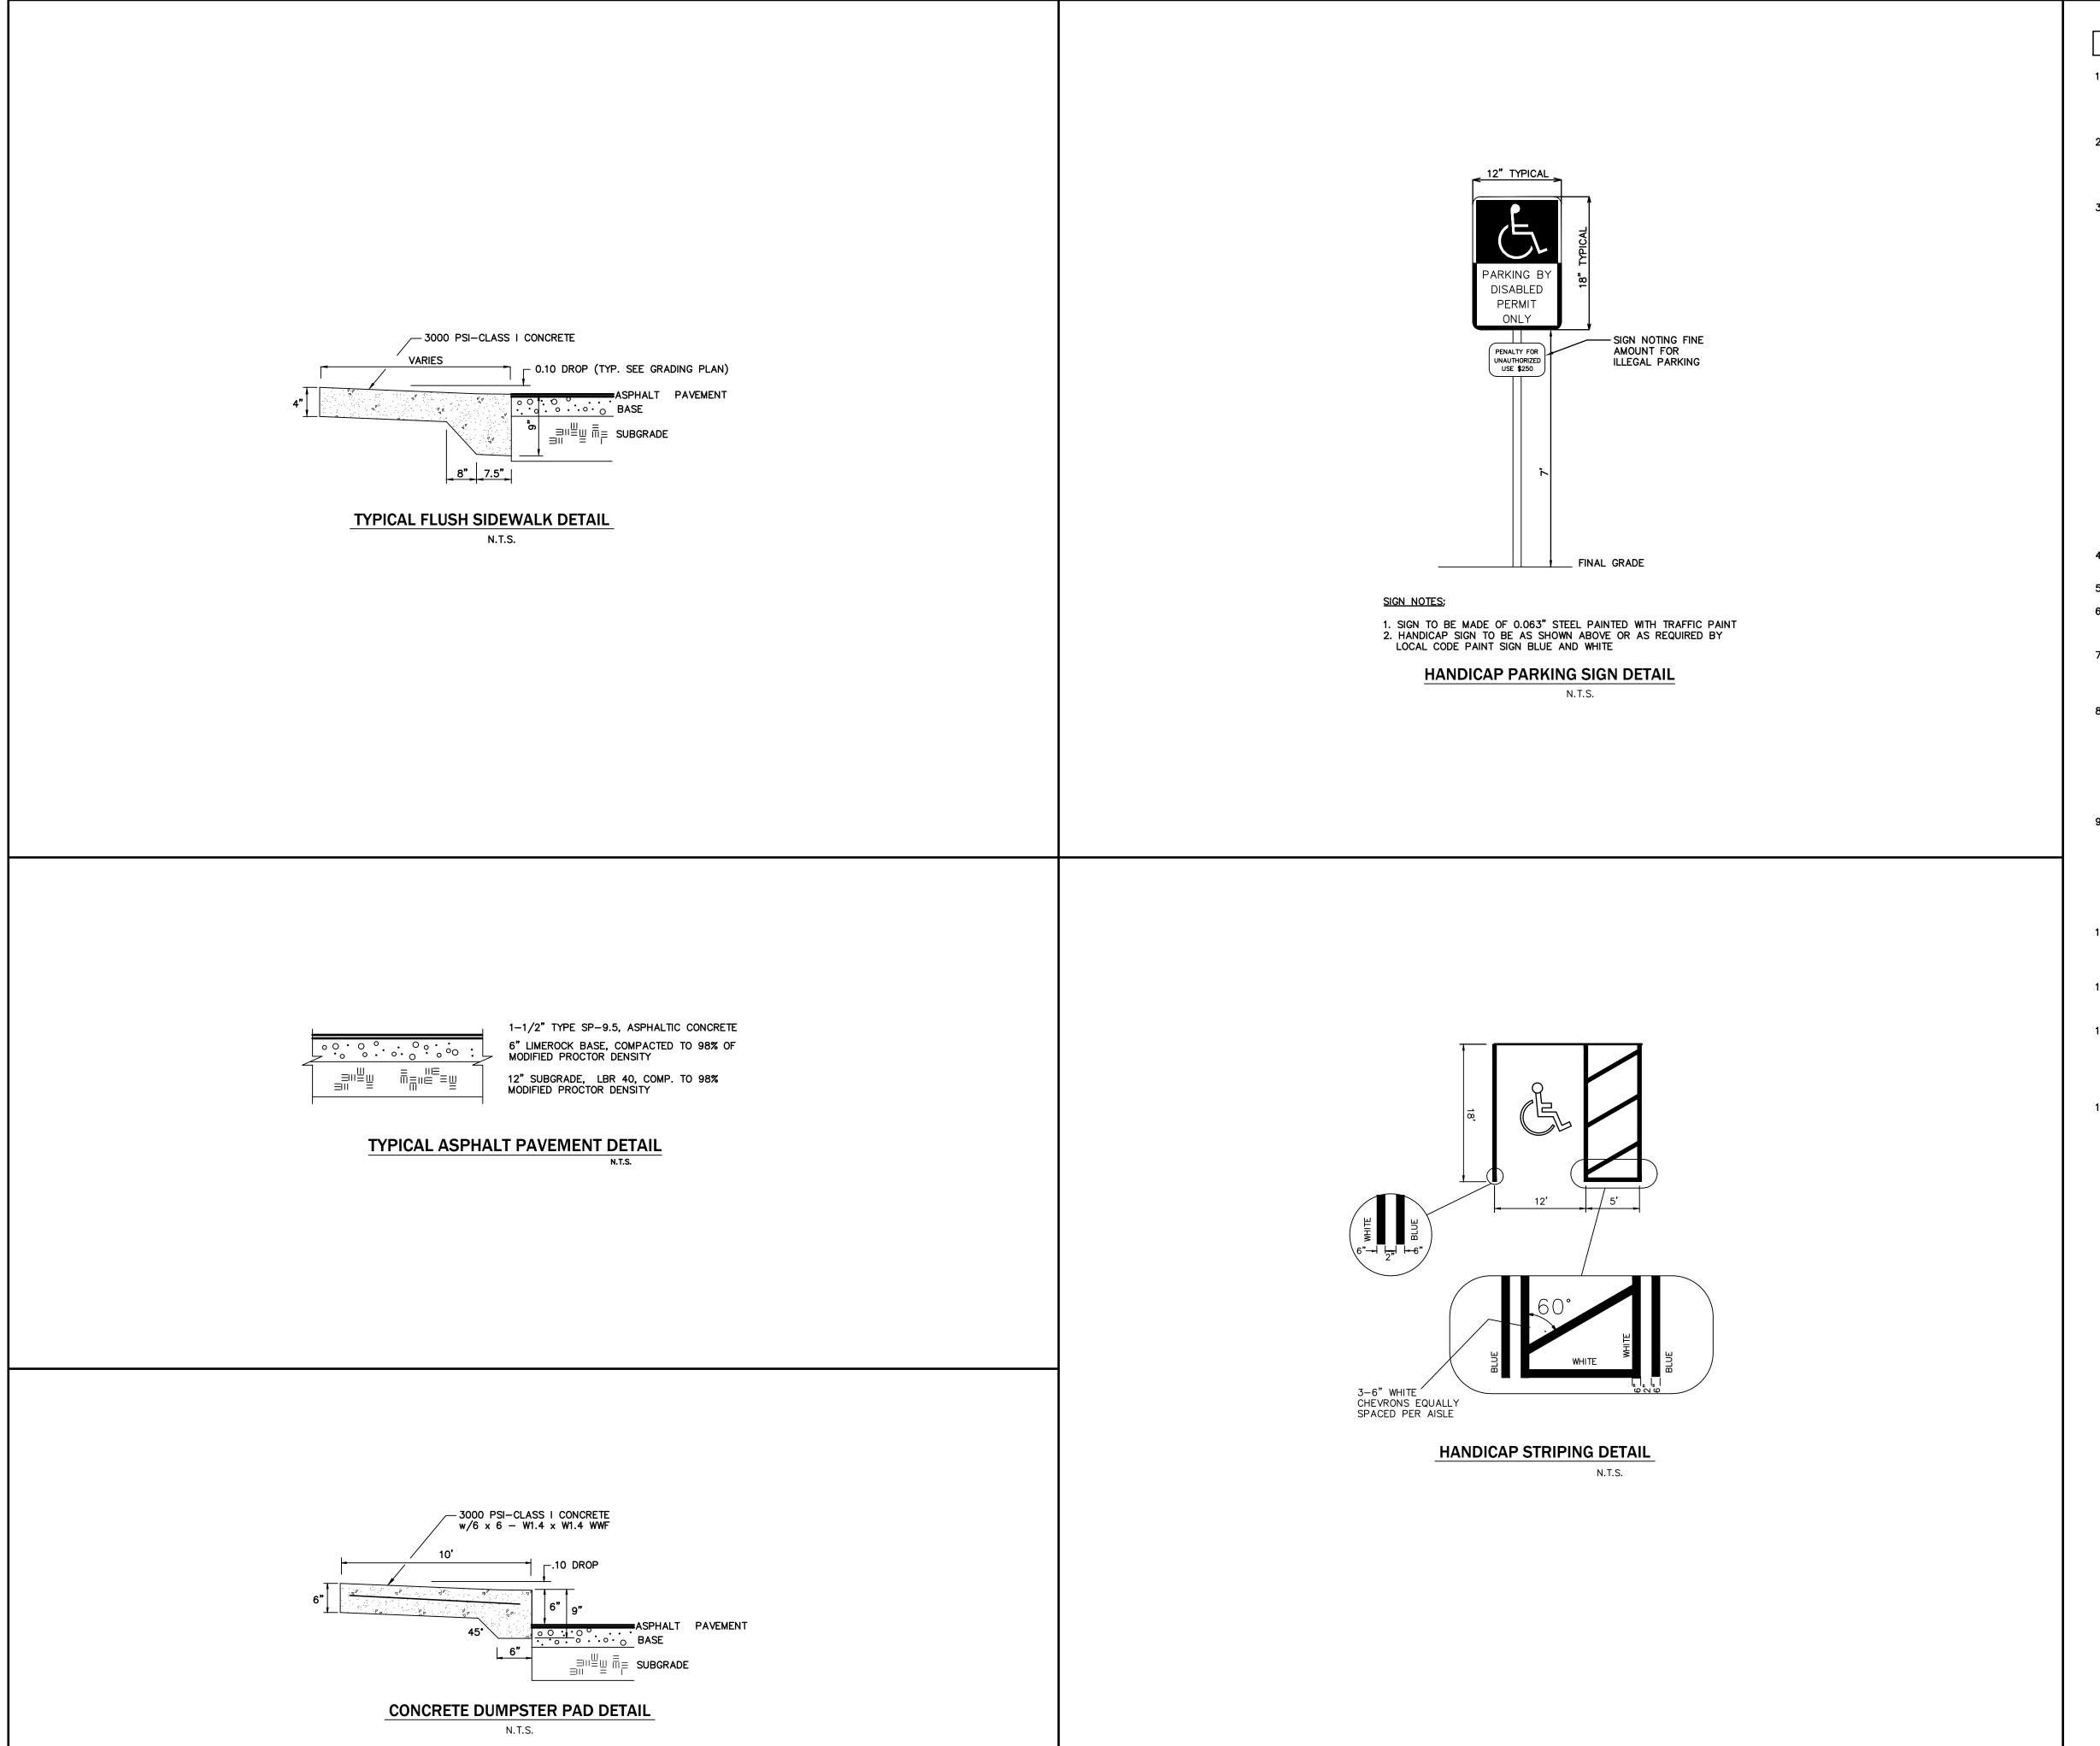

# PAVING. GRADING AND DRAINAGE SPECIFICATIONS

- GENERAL: ALL ROADWAY AND DRAINAGE CONSTRUCTION, INCLUDING MATERIALS, CONSTRUCTION TECHNIQUES, AND TECHNICAL STANDARDS, SHALL BE IN ACCORDANCE WITH THE LATEST F.D.O.T. STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, AND THE LATEST F.D.O.T. ROADWAY AND TRAFFIC DESIGN STANDARDS.
- 2. ALL AREAS OF NEW CONSTRUCTION SHALL BE PREPARED AFTER SITE DEMOLITION. TOP SOIL REMAINING ONSITE MAY BE STOCKPILED FOR FINE GRADING IN LANDSCAPED AREAS, IF SUITABLE. THE CONTRACTOR SHALL FURNISH ALL FILL REQUIRED AND DISPOSE OF ALL EXCESS OR UNSUITABLE MATERIAL OFFSITE IN ACCORDANCE WITH ALL REGULATORY REQUIREMENTS.
- 3. ALL NEW ASPHALT PAVEMENT CONSTRUCTION SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS:
- A. EARTHWORK: FILL MATERIALS SHALL CONFORM TO AASHTO SOIL GROUPS A-1, A-3, OR A-2-4 AND SHALL BE PLACED IN 6"-12" LOOSE LIFTS AND COMPACTED TO 98% DENSITY USING MODIFIED PROCTOR METHOD (AASHTO T-180).
- B. SUBSOIL EXCAVATION: WHERE SUBSOIL EXCAVATION IS REQUIRED, UNSUITABLE MATERIALS SHALL BE REMOVED TO A DEPTH OF 18" BELOW THE LIMEROCK BASE AND BACKFILLED WITH CLEAN FILL.
- C. STABILIZED SUBGRADE: ALL STABILIZED MATERIAL SHALL BE TYPE 'B' CONFORMING TO SECTION 914-3 AND PLACED ACCORDING TO SECTION 160 IN ONE 12" MINIMUM COMPACTED LIFT. SUBGRADE SHALL BE STABILIZED TO A MINIMUM LBR VALUES AND DENSITIES AS SHOWN IN THE TYPICAL SECTIONS.
- D. BASE COURSE: ALL MATERIAL SHALL BE LIMEROCK CONFORMING TO SECTION 911 AND PLACED ACCORDING TO SECTION 200 IN ONE 6" MINIMUM COMPACTED LIFT OR DOUBLE COMPACTED LIFT. ALL BASE MATERIAL SHALL BE COMPACTED TO 98% DENSITY BY MODIFIED PROCTOR METHOD (AASHTO T-180). THE PRIME COAT SHALL CONFORM TO SECTION 300.
- E. ASPHALTIC CONCRETE: ALL ASPHALTIC CONCRETE MATERIAL SHALL BE AS PER DESIGN SECTIONS AND SHALL CONFORM TO SECTION 334. ALL ASPHALTIC CONCRETE CONSTRUCTION SHALL CONFORM TO SECTION 330. ASPHALT PAVEMENT SHALL BE SUPERPAVE SP-PG 67-22 ASPHALT BINDER.
- 4. ALL CONCRETE USED FOR CONSTRUCTION OF DRAINAGE STRUCTURES, SIDEWALKS, AND CURBING SHALL BE CLASS I CONFORMING TO SECTION 346.
- 5. REINFORCED CONCRETE PIPE SHALL CONFORM TO SECTION 941.
- 6. ALL PAVEMENT MARKINGS REQUIRED IN THE R/W SHALL BE THERMOPLASTIC AND INCLUDE RAISED PAVEMENT MARKERS, WHERE REQUIRED CONFORMING
- 7. ALL PAVEMENT MARKING, SYMBOLS AND STRIPING WITHIN THE SITE SHALL MEET THE LATEST FLORIDA HANDICAP ACCESSIBILLITY CODE. PAVEMENT MARKING SHALL BE 4" BLUE/WHITE (HANDICAP) OR WHITE (REGULAR) AND SHALL CONFORM TO THE LATEST F.D.O.T. AND M.U.T.C.D. STANDARDS.
- 8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING A GEOTECHNICAL CONSULTANT TO PROVIDE A FIELD INVESTIGATION REPORT DELINEATING RECOMMENDATIONS FOR UNDERCUTTING AND/OR UNDERDRAINS. A COPY OF THIS REPORT SHALL BE FORWARDED TO THE OWNER AND ENGINEER FOR REVIEW AND APPROVAL PRIOR TO UNDERCUTTING OR INSTALLING UNDERDRAIN. UNIT PRICES SHALL BE PROVIDED FOR UNDERDRAIN AND UNDERCUTTING. THE CONTRACTOR SHALL NOT CONSTRUCT BASE COURSE UNTIL THE REPORT IS REVIEWED AND APPROVED BY THE OWNER AND THE
- 9. SOIL TESTING RESULTS SHALL BE PROVIDED FOR THE PAVEMENT CONSTRUCTION. TESTING RESULTS SHALL BE SUBMITTED FOR THE SUBGRADE AND BASE COURSE, IN ACCORDANCE WITH THE DESIGN SECTION. A MINIMUM OF 5 TEST LOCATIONS SHALL BE PROVIDED ONSITE. THE TESTING REPORT SHALL DENOTE THE TEST LOCATIONS. THE CONTRACTOR SHALL NOT PROCEED TO THE SUBSEQUENT PAVEMENT SECTION UNTIL TESTING -RESULTS ARE APPROVED FOR PREVIOUS SECTION. ALL TESTING REQUIRED WITHIN THE COUNTY R/W SHALL BE COORDINATED WITH THE COUNTY INSPECTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TESTING COST.
- 10. LANDSCAPING: FINAL GRADING IN OPEN AREAS AND LANDSCAPE ISLANDS SHALL BE COORDINATED WITH THE LANDSCAPE CONTRACTOR AND THE OWNER. THE CONTRACTOR SHALL ALSO COORDINATE THE PLACEMENT OF ANY IRRIGATION AND ELECTRICAL CONDUIT SLEEVES DURING CONSTRUCTION.
- 11. ROOF RUNOFF WILL BE DIRECTED TO THE STORMWATER SYSTEM IF A GUTTER COLLECTION SYSTEM IS NOT SHOWN IN THE PLANS. RUNOFF COLLECTION SHALL BE COORDINATED WITH THE ARCHITECT.
- 12. REMOVAL OF ALL CONSTRUCTION DEBRIS, LIMEROCK, EXCESS OF BUILDERS SAND, CONCRETE AND MORTAR DEBRIS, EXISTING WEEDS AND GRASSES, AND ALL FOREIGN MATERIALS IN THE PLANTING BED AND SOD AREAS IS THE RESPONSIBILITY OF THE SITE WORK CONTRACTOR. SOIL IN AREAS TO BE LANDSCAPED SHALL BE UNCOMPACTED, SUITABLE FOR ROOT GROWTH WITH APPROPRIATE AMOUNTS OF ORGANIC MATTER, AND OF ph 5.5–6.5.
- 13. TREE BARRICADES MUST REMAIN IN PLACE AND IN THE DIMENSIONS SHOWN ON THE PLAN UNTIL LANDSCAPING BEGINS. SEE NOTE ON SHEET CO.20 AND THE DETAIL ON THE LANDSCAPE PLAN.



consultants inc.

EB 2389
720 S.W. 2nd Ave, South Tower, Suite 300
GAINESVILLE, FLORIDA 32601 TEL. (352) 373-3541 www.edafl.com permitting@edafl.com

> SCALES: AS SHOWN

No.	Date	Comment
	•	·

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY CLAUDIA S. VEGA, P.E. ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Professional Engineer of Record:

Claudia S. Vega, P.E. 51532 Certificate No. Engineer

23-052

Project phase: PRELIMINARY/FINAL

Project title:

ALACHUA COUNTY **CUSCOWILLA FIRE RESCUE** STATION PHASE 1 PRELIMINARY AND FINAL DEVELOPMENT PLAN ALACHUA COUNTY, FLORIDA

PAVING, GRADING DETAILS AND NOTES

Drawn: MAB/NJG Checked:

Designed: CSV

Date: 04/25/24